


Thread-Level Parallelism — Simultaneous MultiThreading (SMT) & Chip Multi-Processors (CMP)

Hung-Wei

SuperScalar Processor w/ ROB

Fetch/decode instruction →

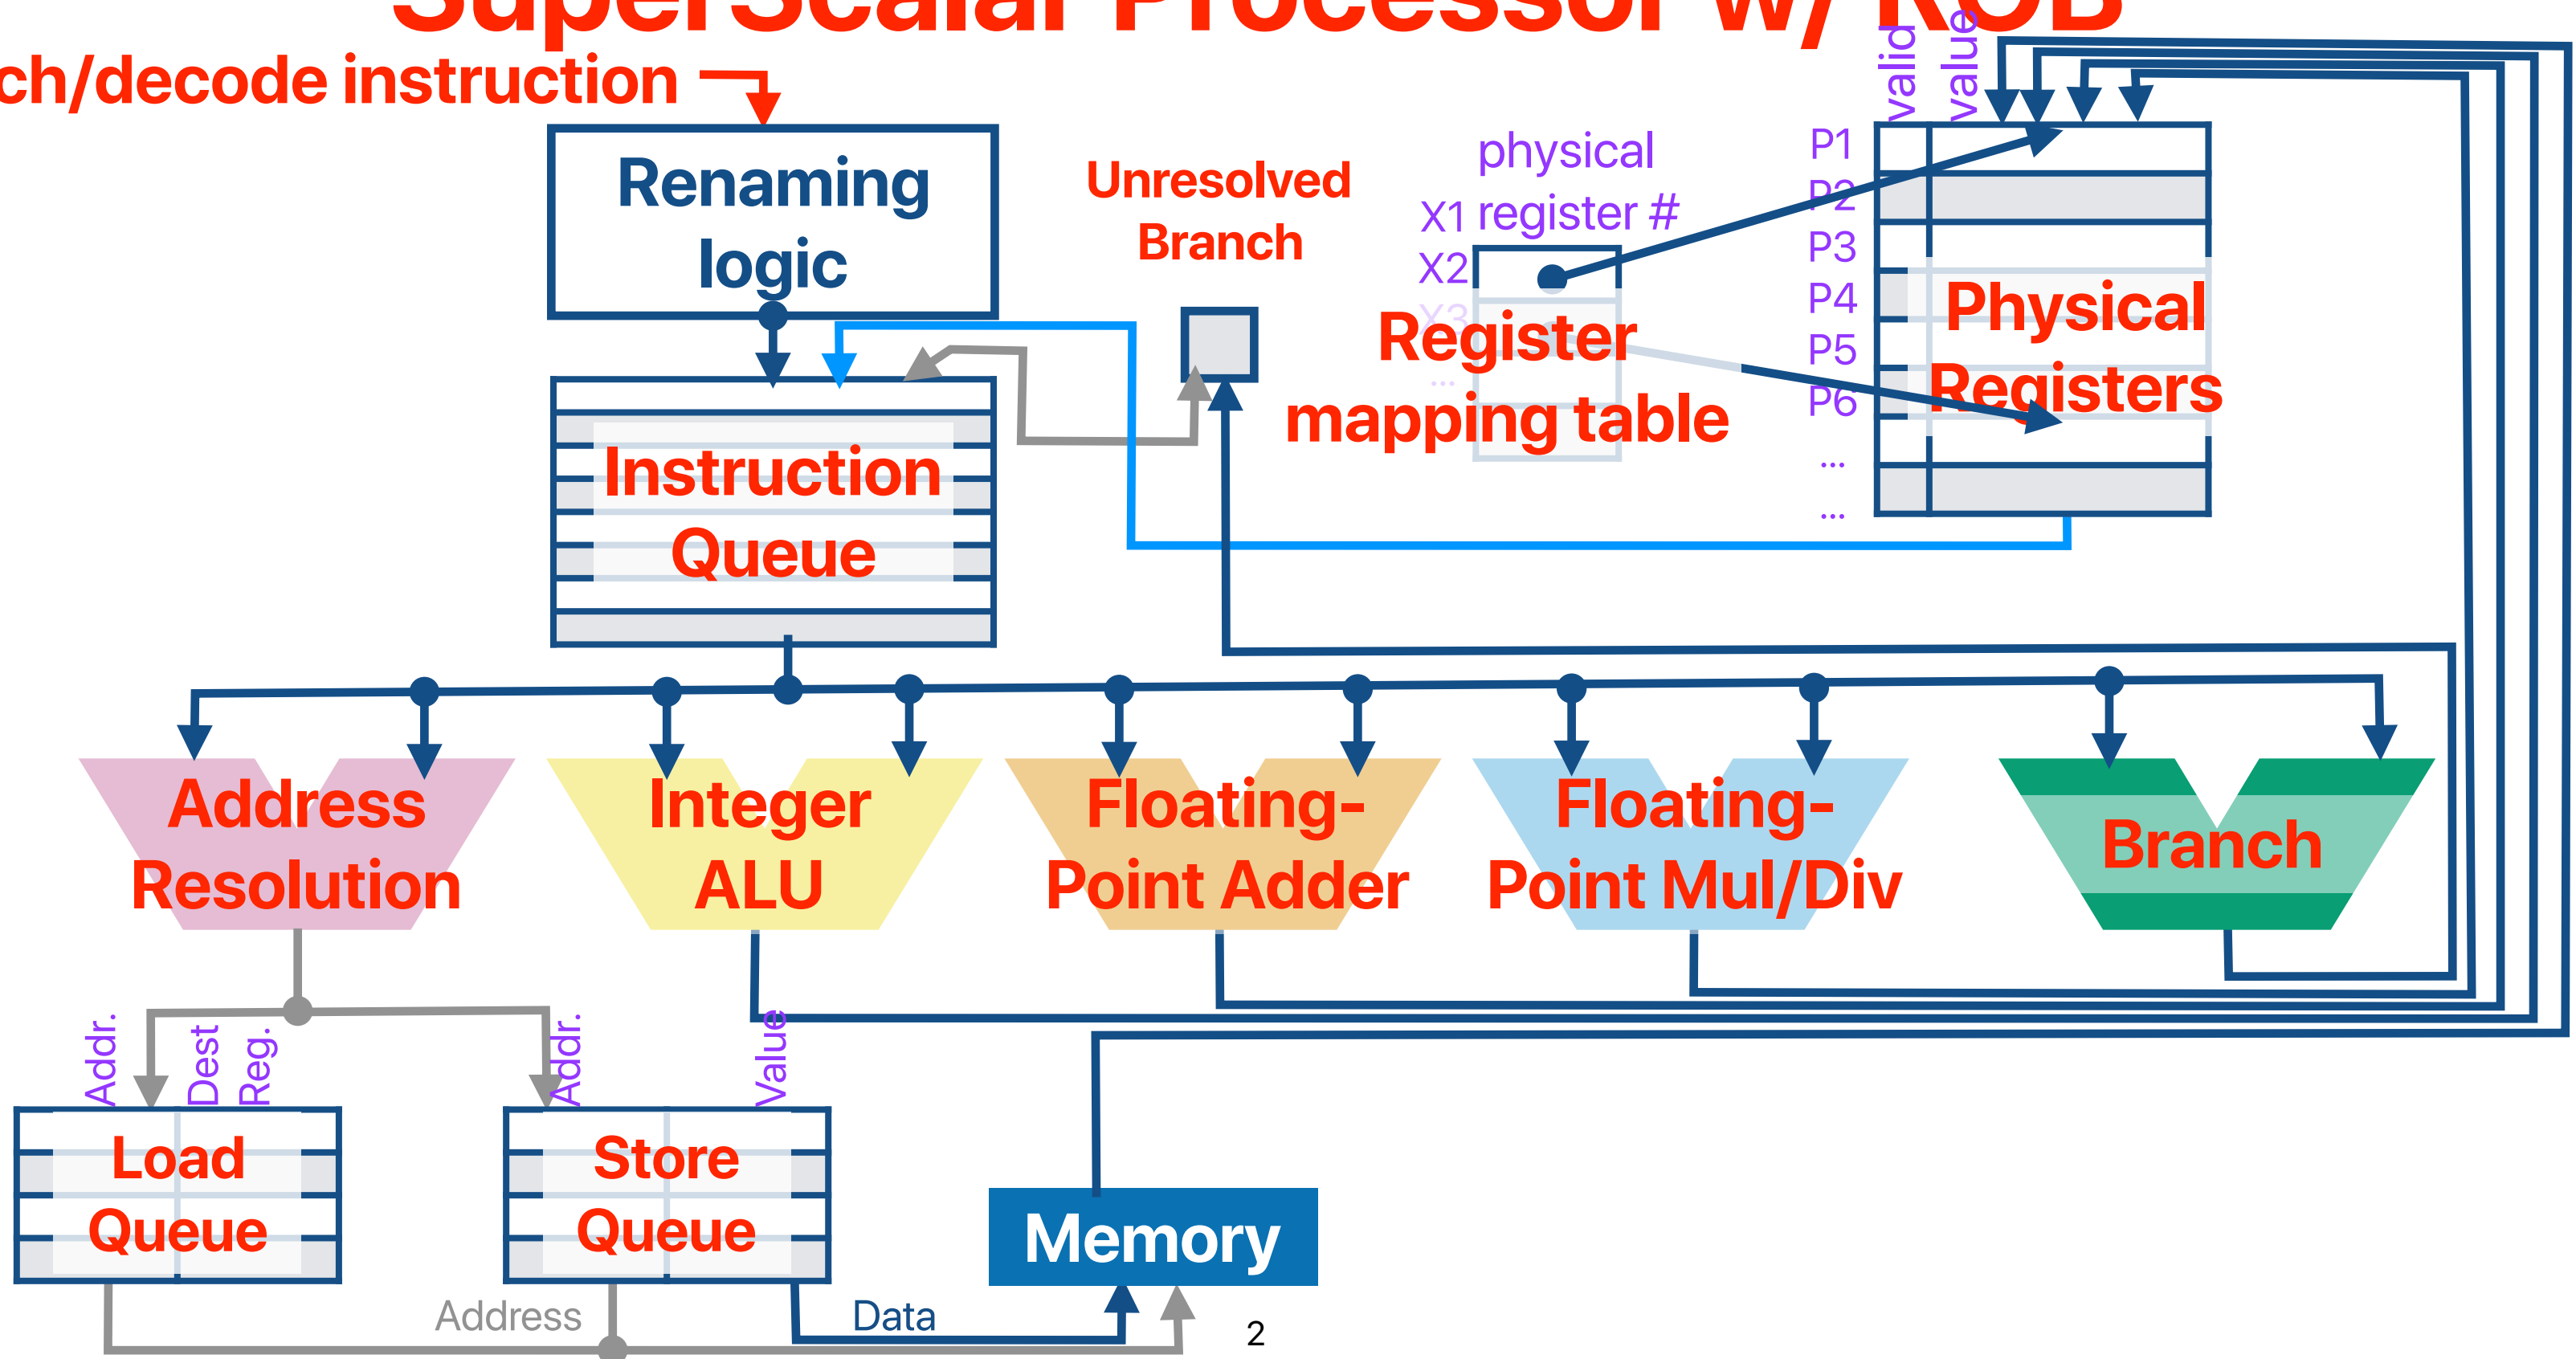

Recap: What about "linked list"


Static instructions

```
LOOP: ld    X10, 8(X10)
      addi  X7, X7, 1
      bne   X10, X0, LOOP
```

Dynamic instructions

```
① ld    X10, 8(X10)
② addi  X7, X7, 1
③ bne   X10, X0, LOOP
④ ld    X10, 8(X10)
⑤ addi  X7, X7, 1
⑥ bne   X10, X0, LOOP
⑦ ld    X10, 8(X10)
⑧ addi  X7, X7, 1
⑨ bne   X10, X0, LOOP
```

ILP is low because of data dependencies

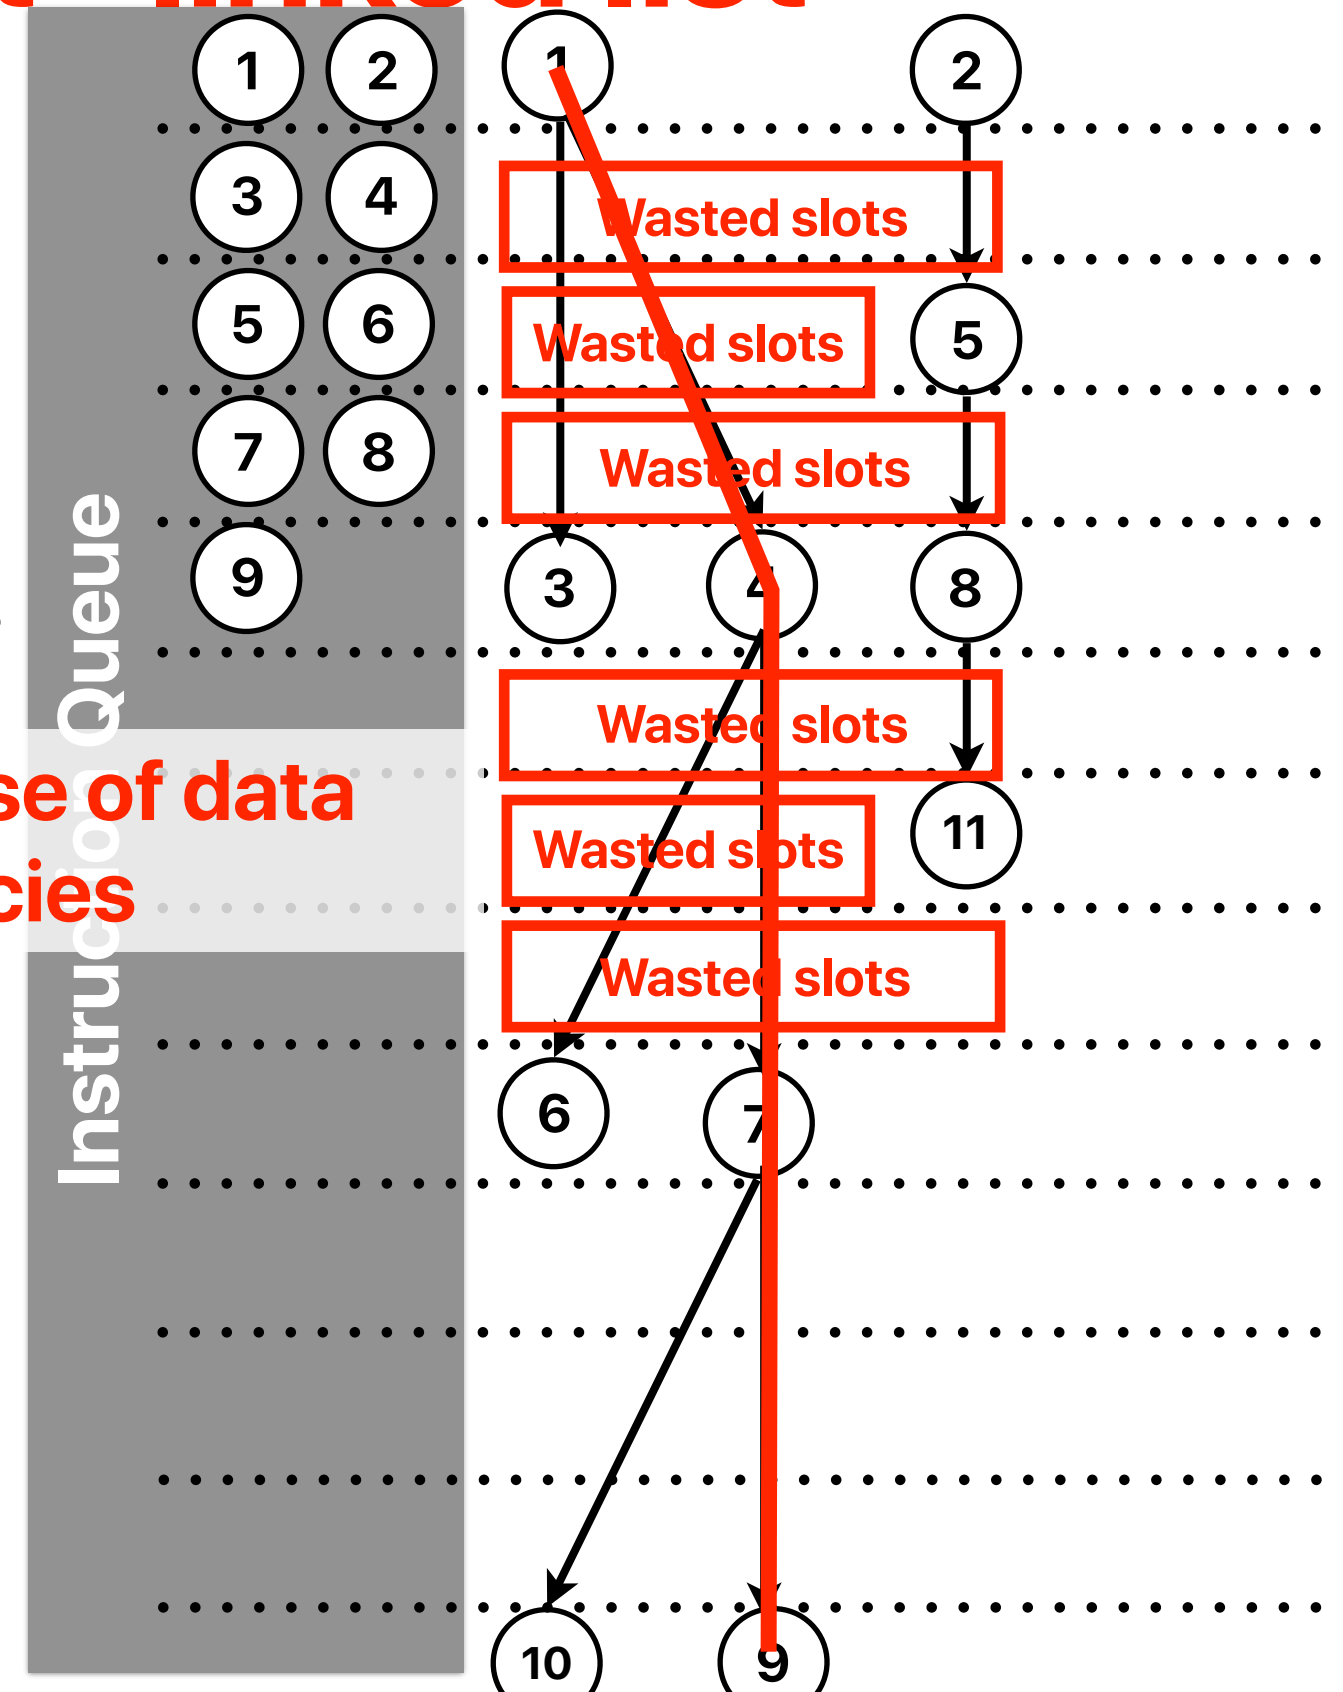


Demo: ILP within a program

- perf is a tool that captures performance counters of your processors and can generate results like branch mis-prediction rate, cache miss rates and ILP.

Simultaneous multithreading: maximizing on-chip parallelism

Dean M. Tullsen, Susan J. Eggers, Henry M. Levy

Department of Computer Science and Engineering, University of Washington

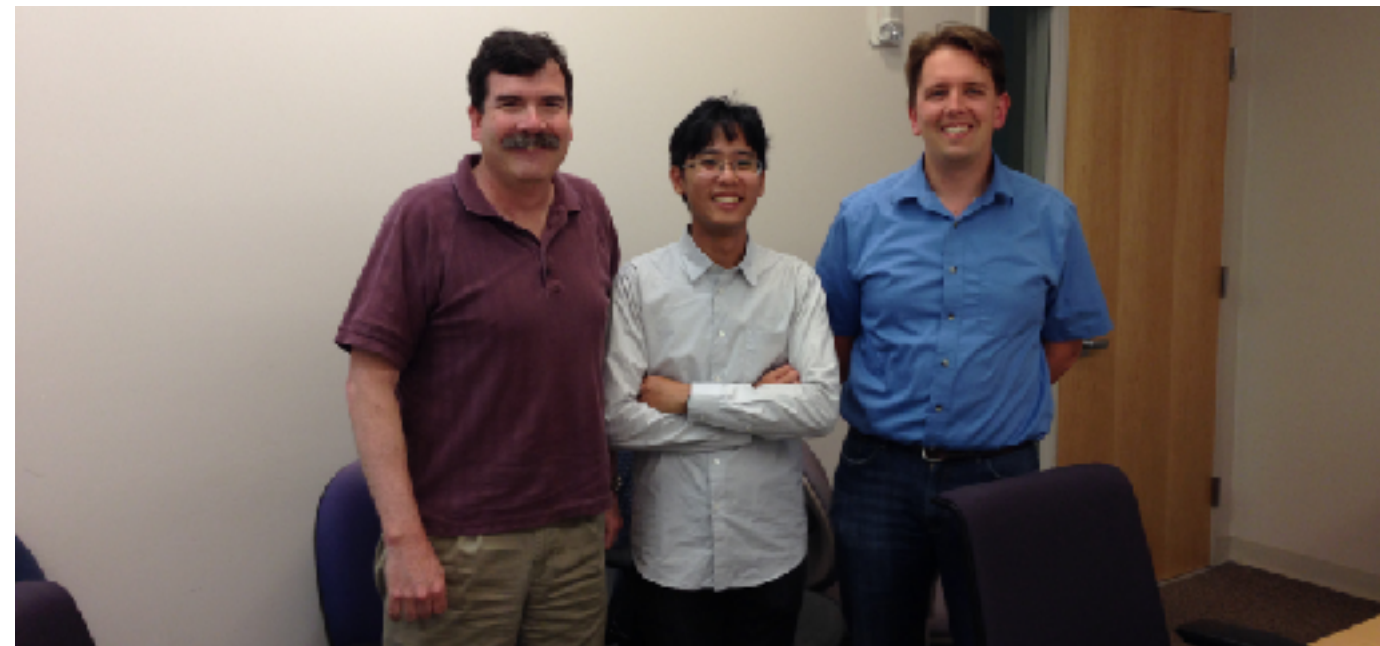

Simultaneous multithreading

- The processor can schedule instructions from different threads/processes/programs
- Fetch instructions from different threads/processes to fill the not utilized part of pipeline
 - Exploit “thread level parallelism” (TLP) to solve the problem of insufficient ILP in a single thread
 - You need to create an illusion of multiple processors for OSs

Simultaneous multithreading

```


① ld      X10, 8(X10)
② addi    X7, X7, 1
③ bne     X10, X0, LOOP
④ ld      X10, 8(X10)
⑤ addi    X7, X7, 1
⑥ bne     X10, X0, LOOP
⑦ ld      X10, 8(X10)
⑧ addi    X7, X7, 1
⑨ bne     X10, X0, LOOP

```

```

①    ld      X1, 0(X10)
②    addi    X10, X10, 8
③    add     X20, X20, X1
④    bne     X10, X2, LOOP
⑤    ld      X1, 0(X10)
⑥    addi    X10, X10, 8
⑦    add     X20, X20, X1
⑧    bne     X10, X2, LOOP
⑨    ld      X1, 0(X10)
⑩    addi    X10, X10, 8
⑪    add     X20, X20, X1
⑫    bne     X10, X2, LOOP

```

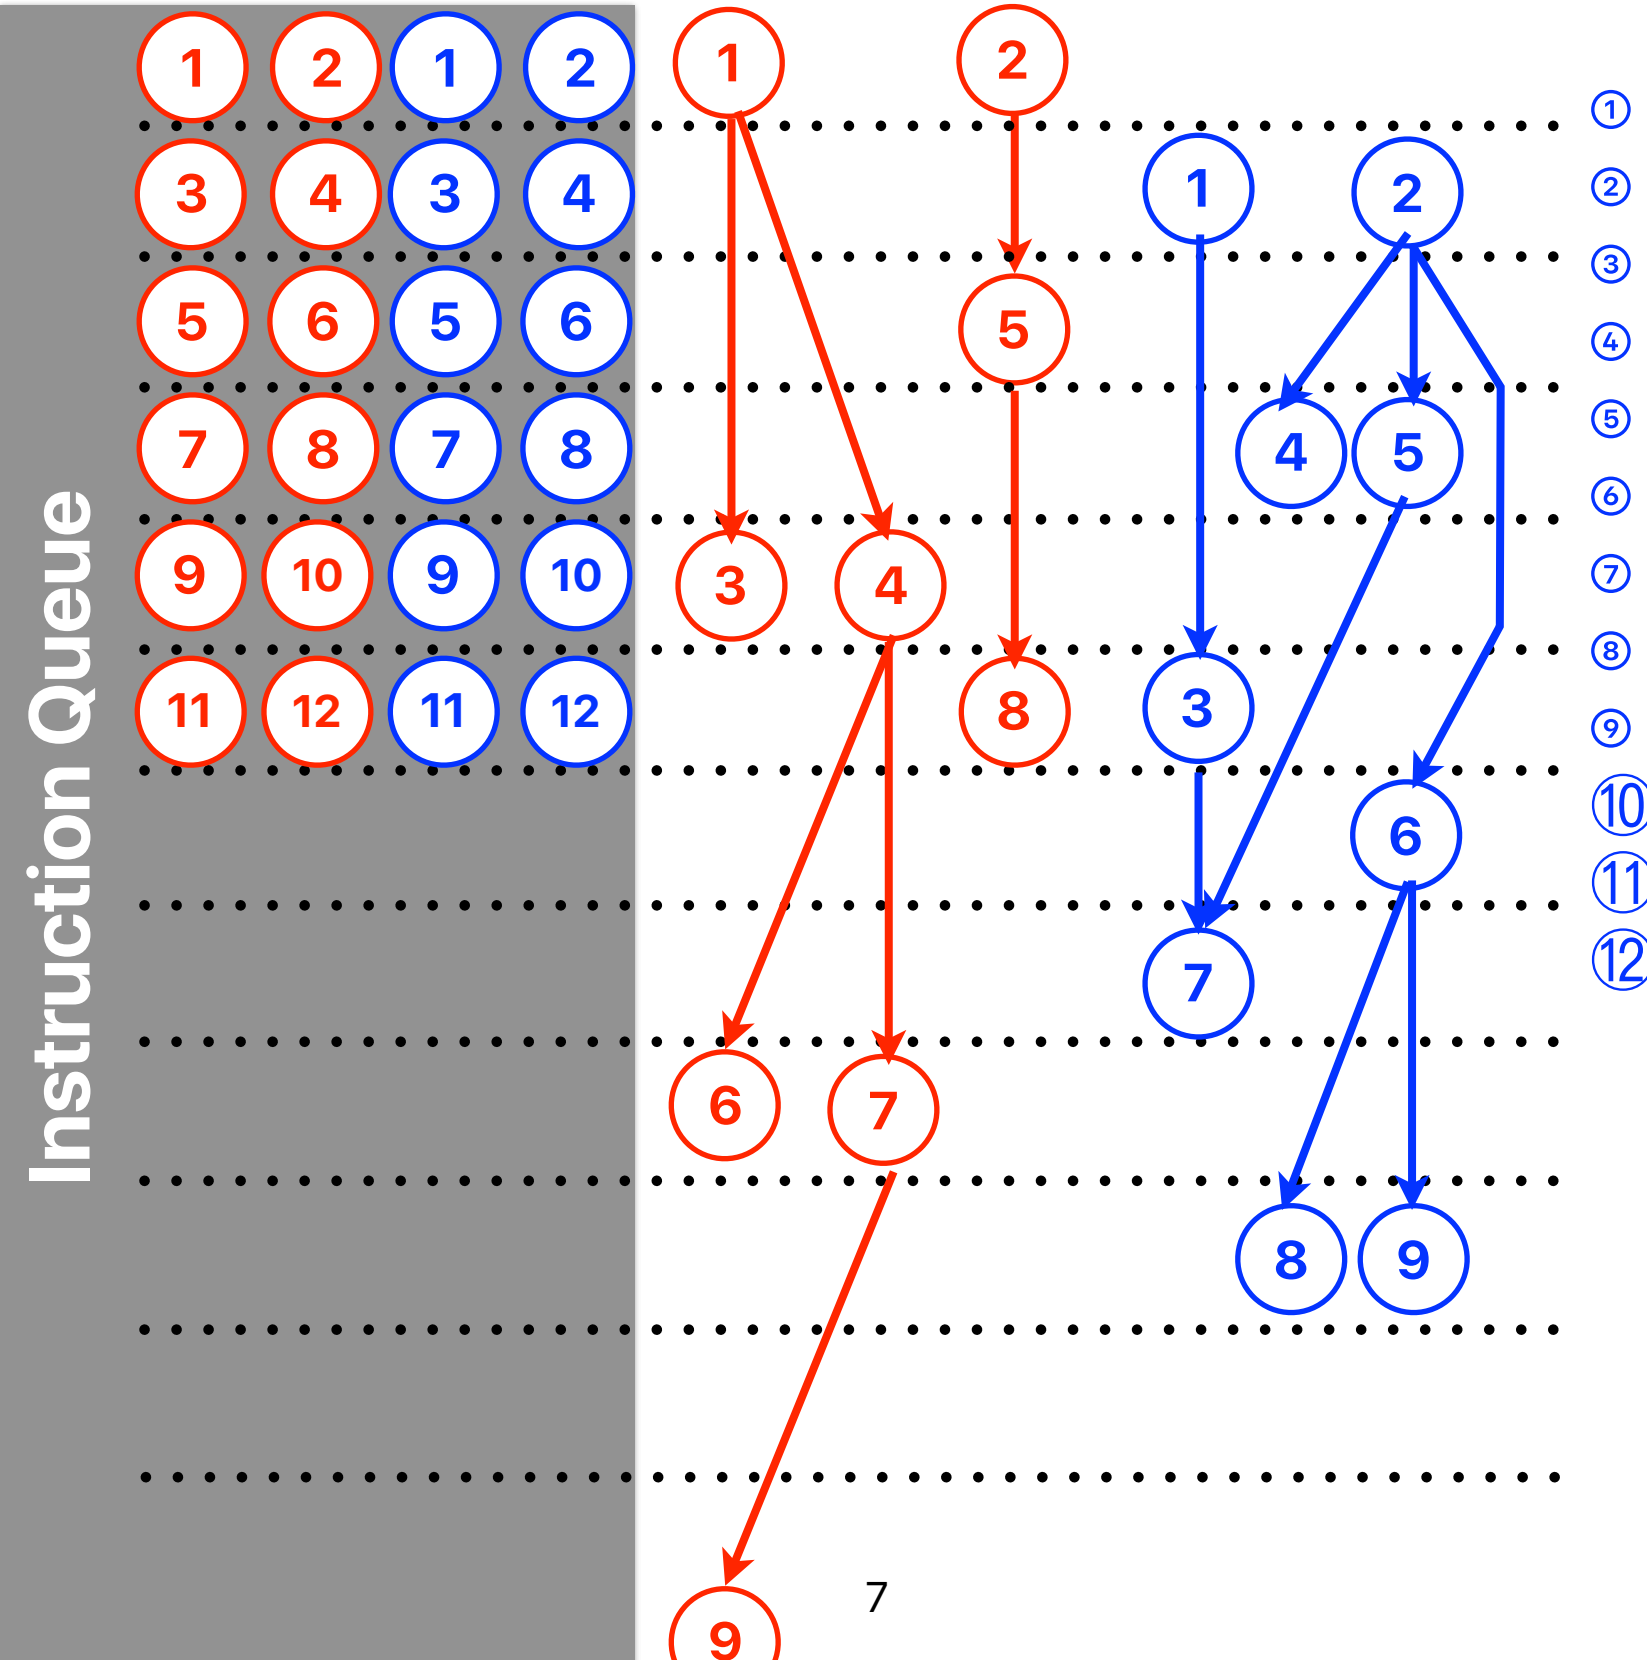

Architectural support for simultaneous multithreading

- To create an illusion of a multi-core processor and allow the core to run instructions from multiple threads concurrently, how many of the following units in the processor must be duplicated/extended?

- ① Program counter — **you need to have one for each context**
- ② Register mapping tables — **you need to have one for each context**
- ③ Physical registers — **you can share**
- ④ ALUs — **you can share**
- ⑤ Data cache — **you can share**
- ⑥ Reorder buffer/Instruction Queue — **you need to indicate which context the instruction is from**

A. 2

B. 3


C. 4

D. 5


E. 6

SuperScalar Processor w/ ROB

Fetch/decode instruction →

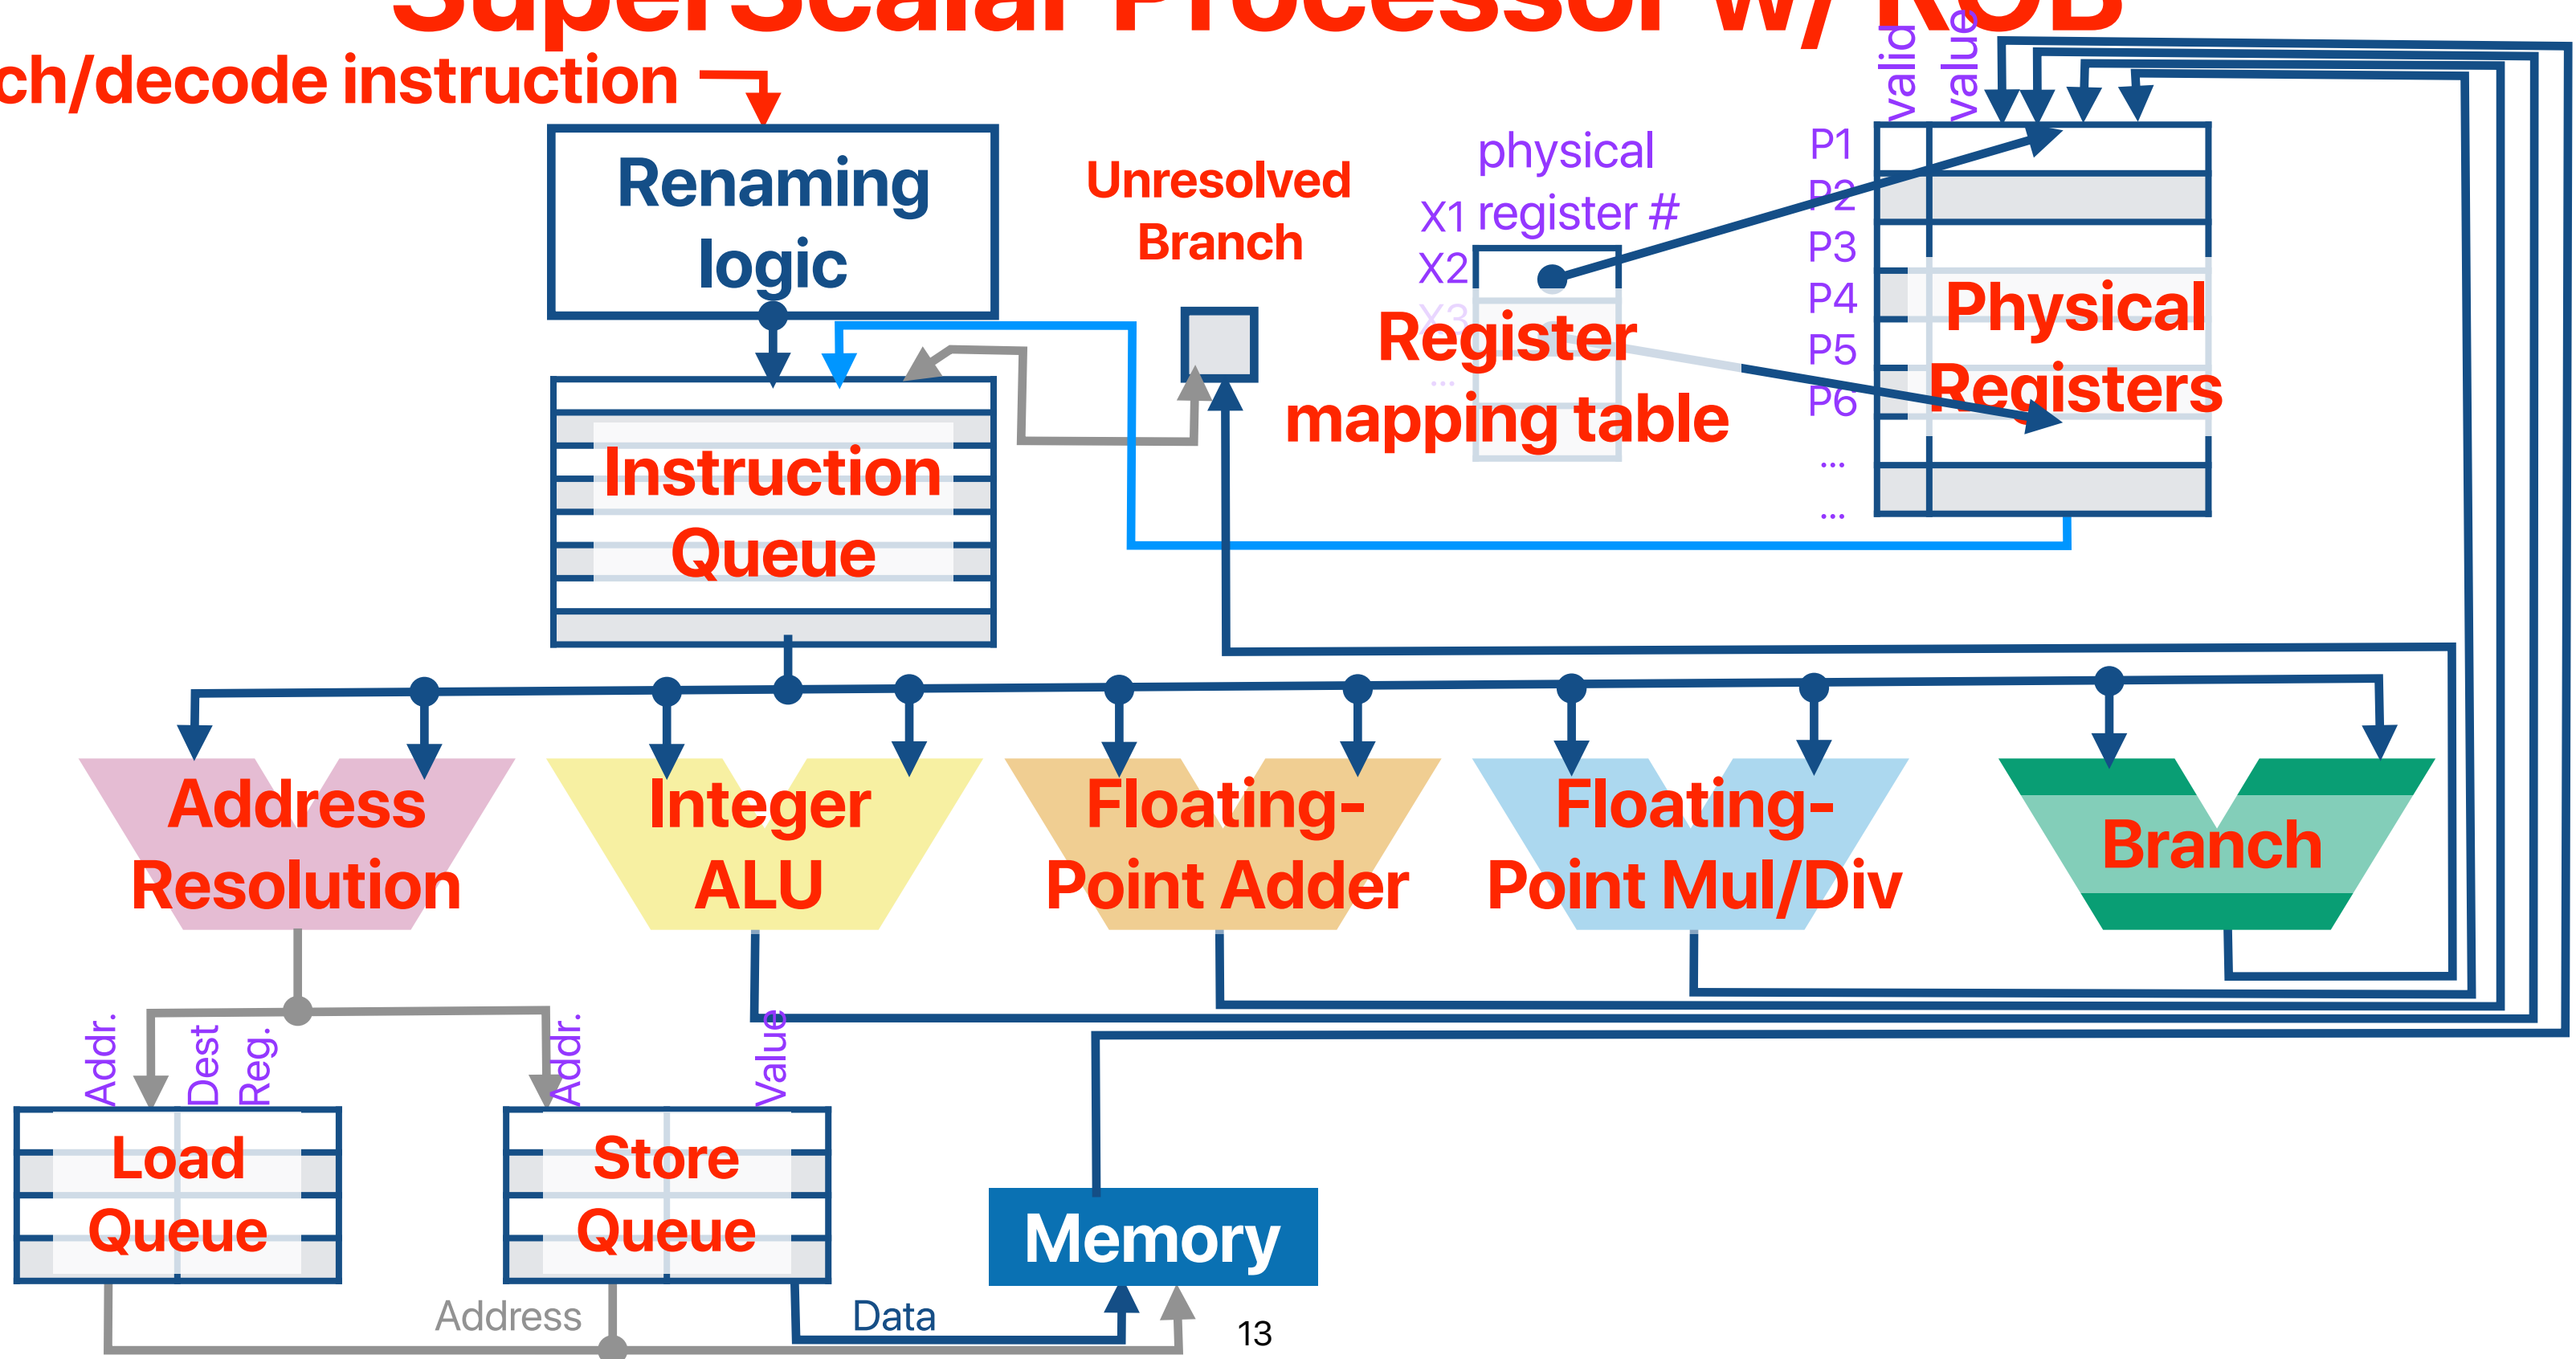

SMT SuperScalar Processor w/ ROB

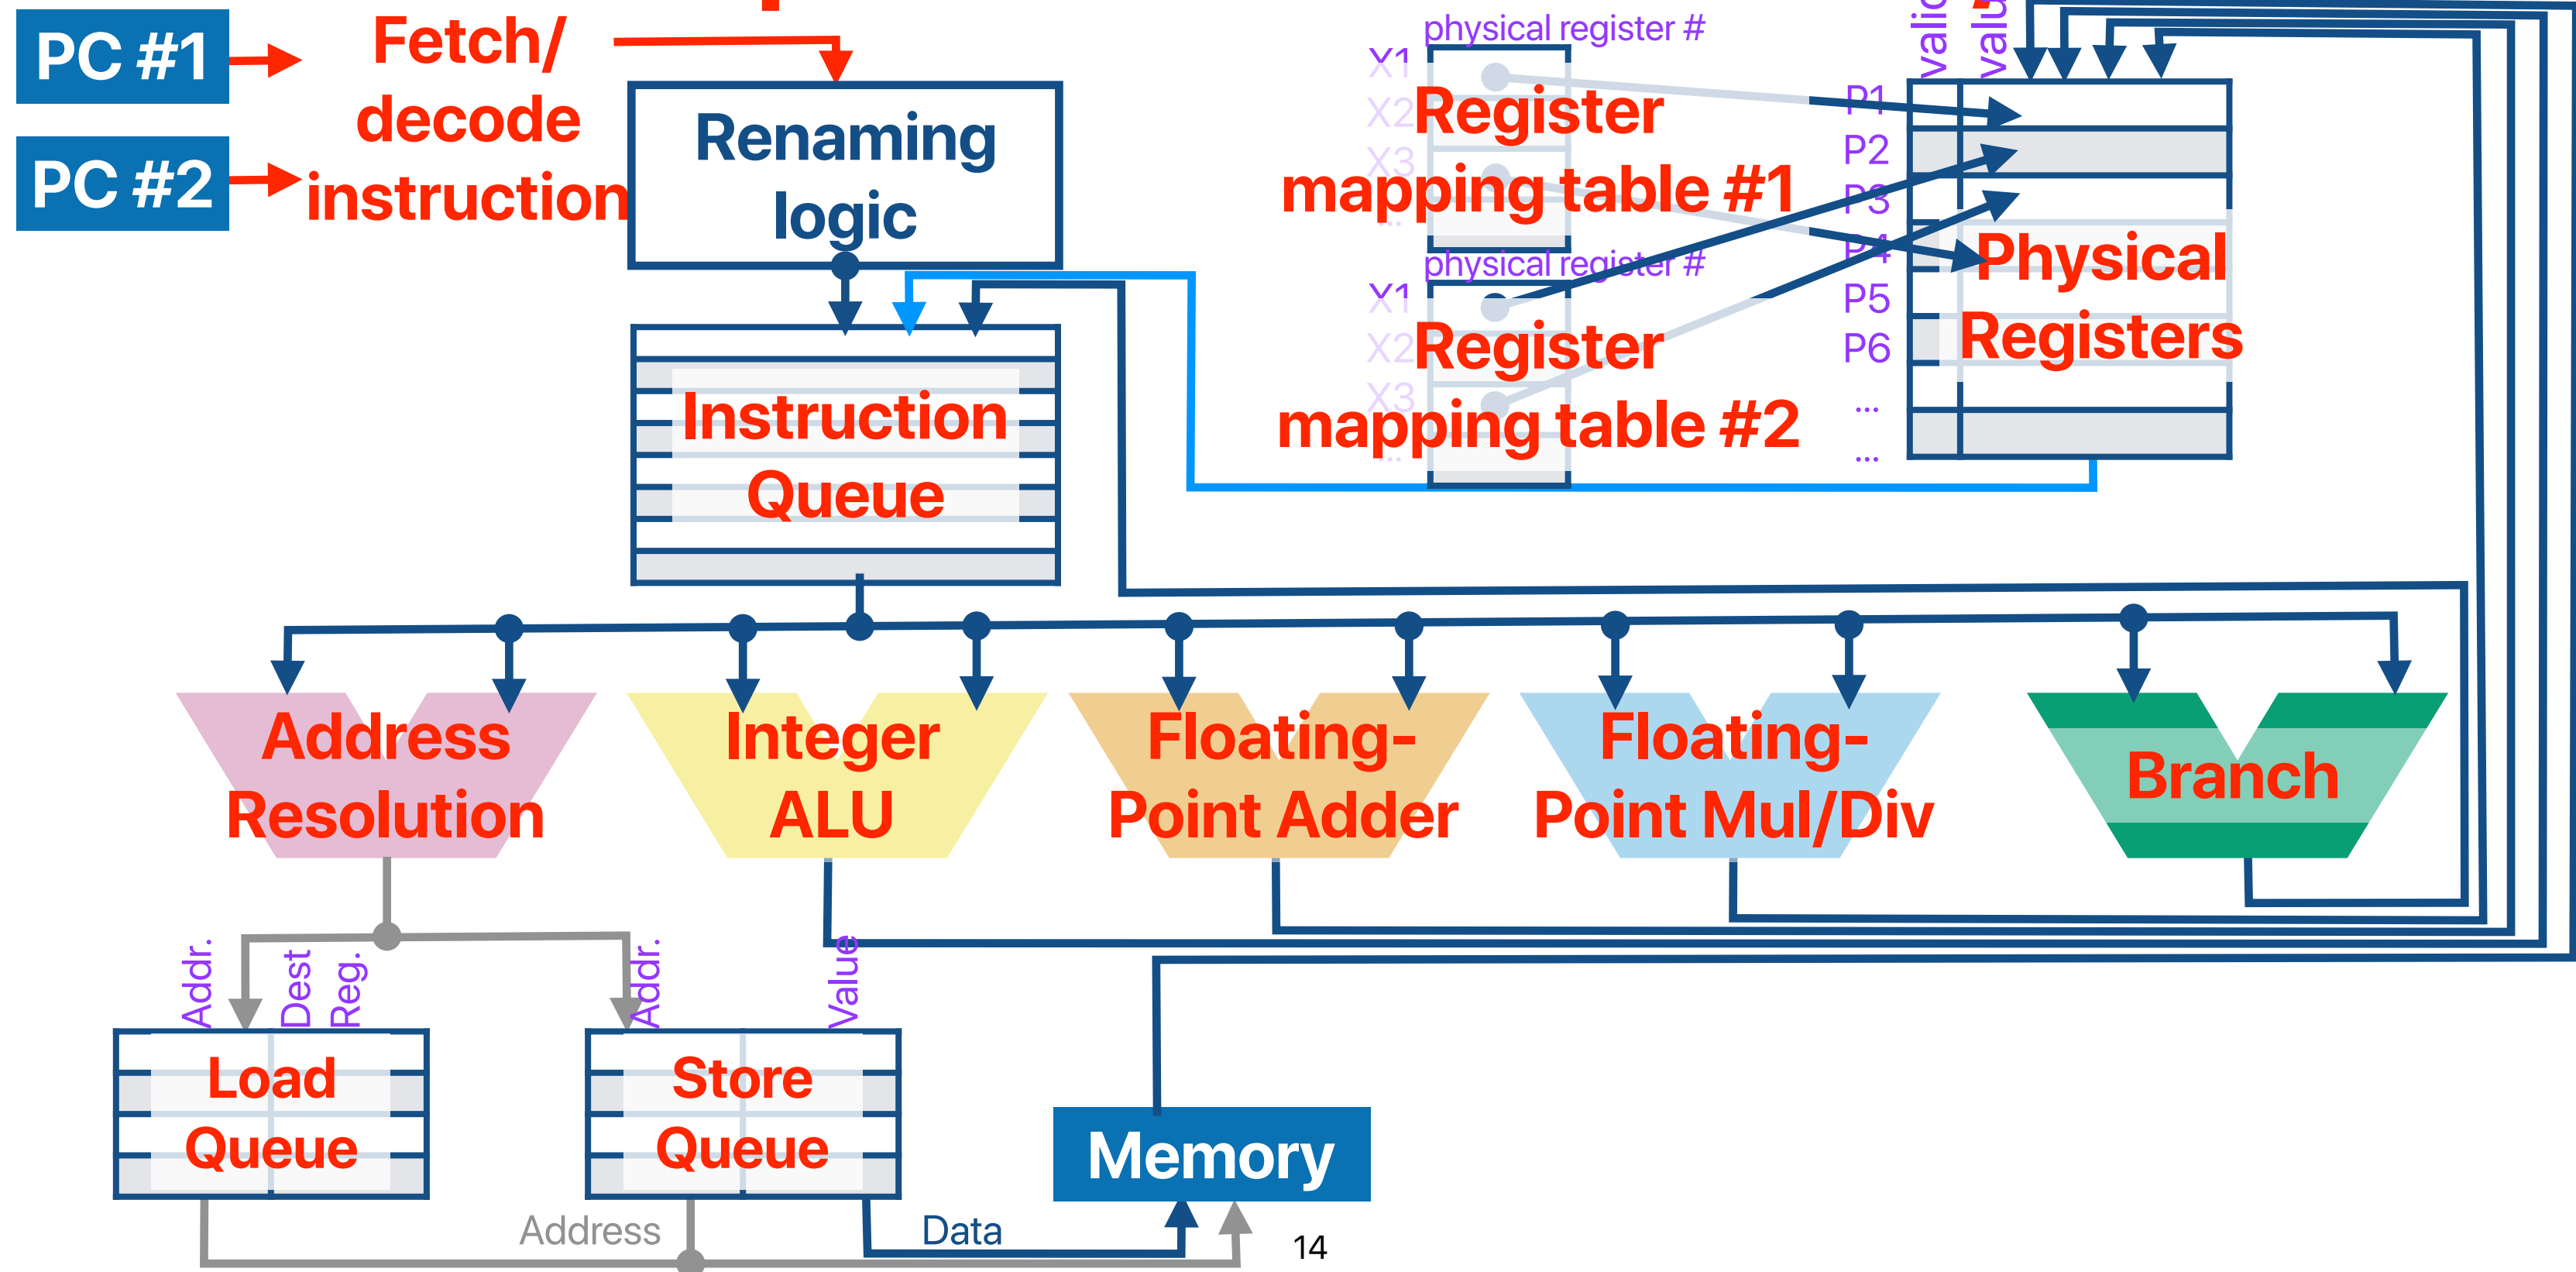


SMT

- How many of the following about SMT are correct?
 - ① SMT makes processors with deep pipelines more tolerable to mis-predicted branches **We can execute from other threads/contexts instead of the current one**
hurt, b/c you are sharing resource with other threads.
 - ② SMT can ~~improve~~ the throughput of a single-threaded application
 - ③ SMT processors can better utilize hardware during cache misses comparing with superscalar processors with the same issue width **We can execute from other threads/contexts instead of the current one**
 - ④ SMT processors can have higher cache miss rates comparing with superscalar processors with the same cache sizes when executing the same set of applications.
b/c we're sharing the cache
- A. 0
- B. 1
- C. 2
- D. 3
- E. 4

SMT

- Improve the throughput of execution
 - May increase the latency of a single thread
- Less branch penalty per thread
- Increase hardware utilization
- Simple hardware design: Only need to duplicate PC/Register Files
- Real Case:
 - Intel HyperThreading (supports up to two threads per core)
 - Intel Pentium 4, Intel Atom, Intel Core i7
 - AMD RyZen

SMT SuperScalar Processor w/ ROB

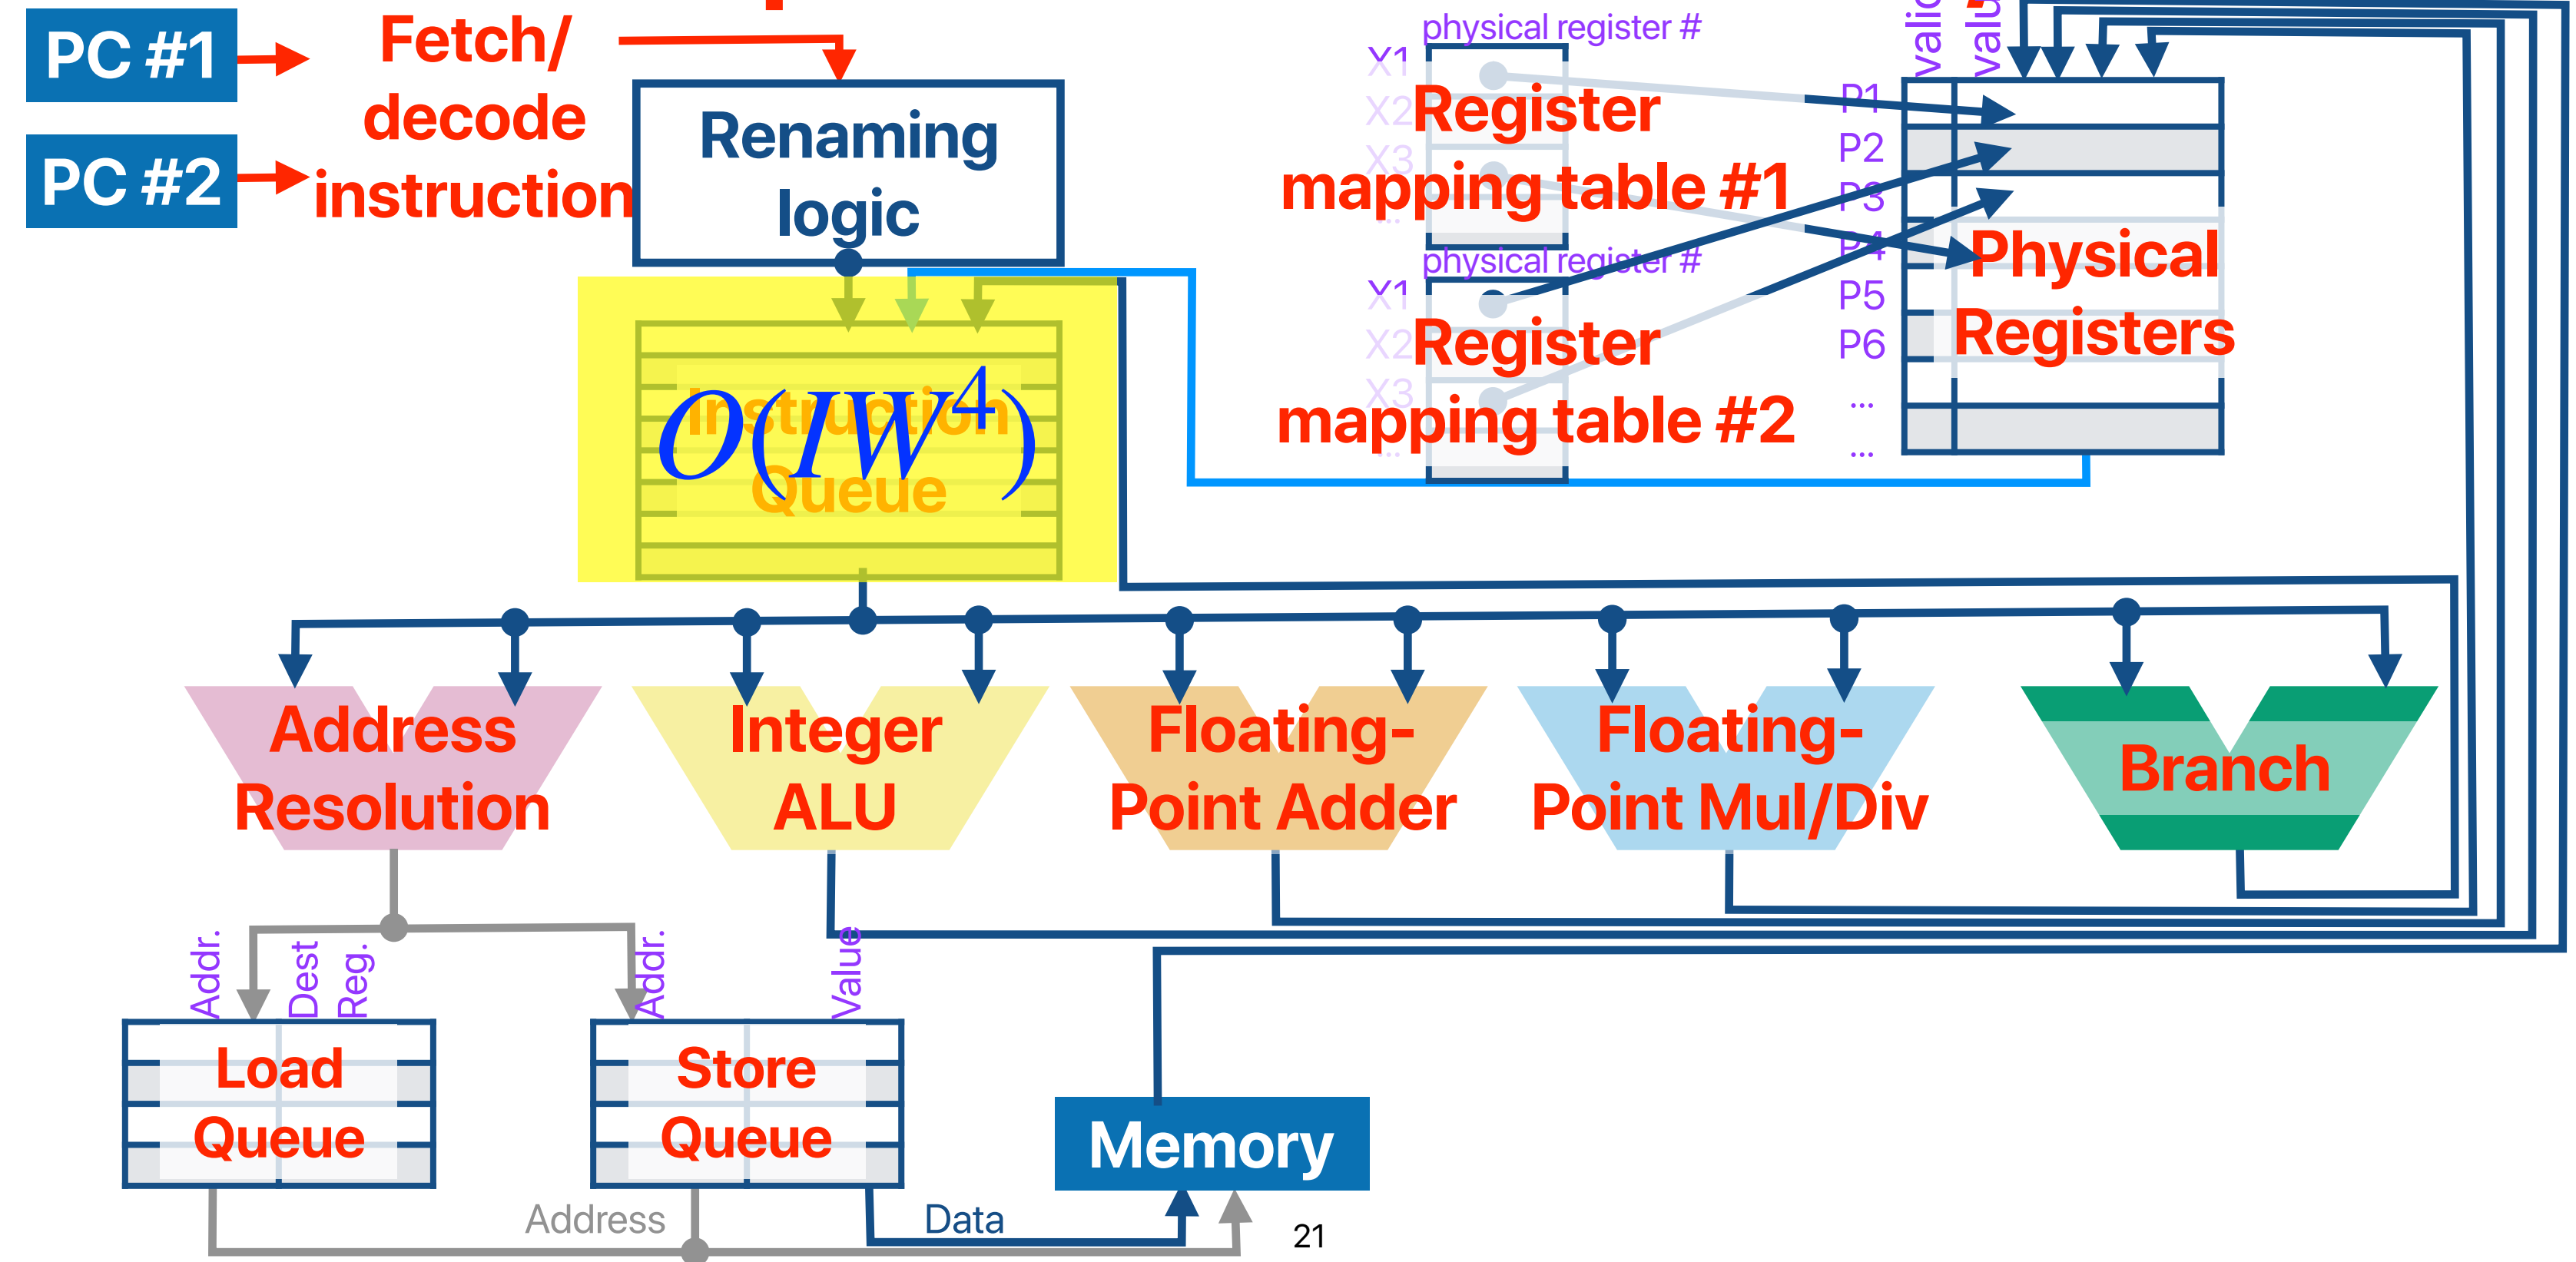

Wider-issue processors won't give you much more

Program	IPC	BP Rate %	I cache %MPCI	D cache %MPCI	L2 cache %MPCI
compress	0.9	85.9	0.0	3.5	1.0
eqntott	1.3	79.8	0.0	0.8	0.7
m88ksim	1.4	91.7	2.2	0.4	0.0
MPsim	0.8	78.7	5.1	2.3	2.3
applu	0.9	79.2	0.0	2.0	1.7
apsi	0.6	95.1	1.0	4.1	2.1
swim	0.9	99.7	0.0	1.2	1.2
tomcatv	0.8	99.6	0.0	7.7	2.2
pmake	1.0	86.2	2.3	2.1	0.4

Table 5. Performance of a single 2-issue superscalar processor.

Program	IPC	BP Rate %	I cache %MPCI	D cache %MPCI	L2 cache %MPCI
compress	1.2	86.4	0.0	3.9	1.1
eqntott	1.8	80.0	0.0	1.1	1.1
m88ksim	2.3	92.6	0.1	0.0	0.0
MPsim	1.2	81.6	3.4	1.7	2.3
applu	1.7	79.7	0.0	2.8	2.8
apsi	1.2	95.6	0.2	3.1	2.6
swim	2.2	99.8	0.0	2.3	2.5
tomcatv	1.3	99.7	0.0	4.2	4.3
pmake	1.4	82.7	0.7	1.0	0.6



Table 6. Performance of the 6-issue superscalar processor.

The case for a Single-Chip Multiprocessor


**Kunle Olukotun, Basem A. Nayfeh, Lance Hammond, Ken Wilson, and Kunyung
Chang**


Stanford University

Wide-issue SS processor v.s. multiple narrower-issue SS processors

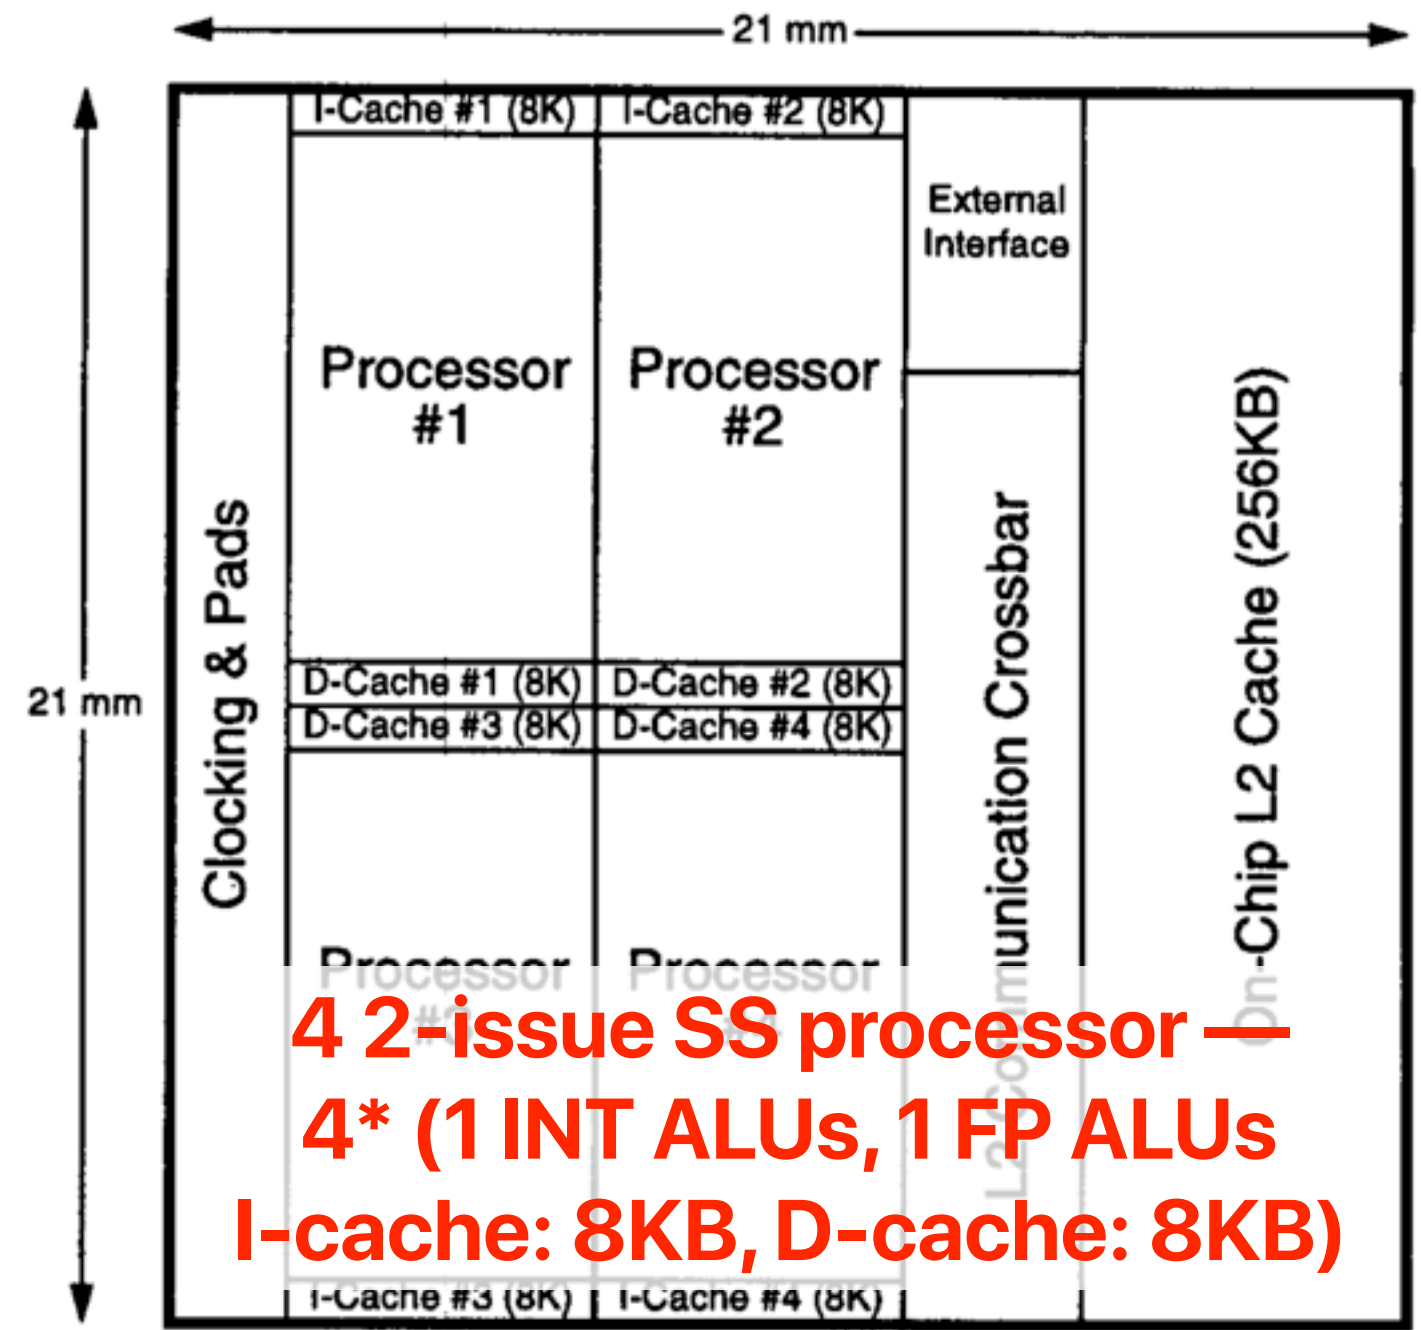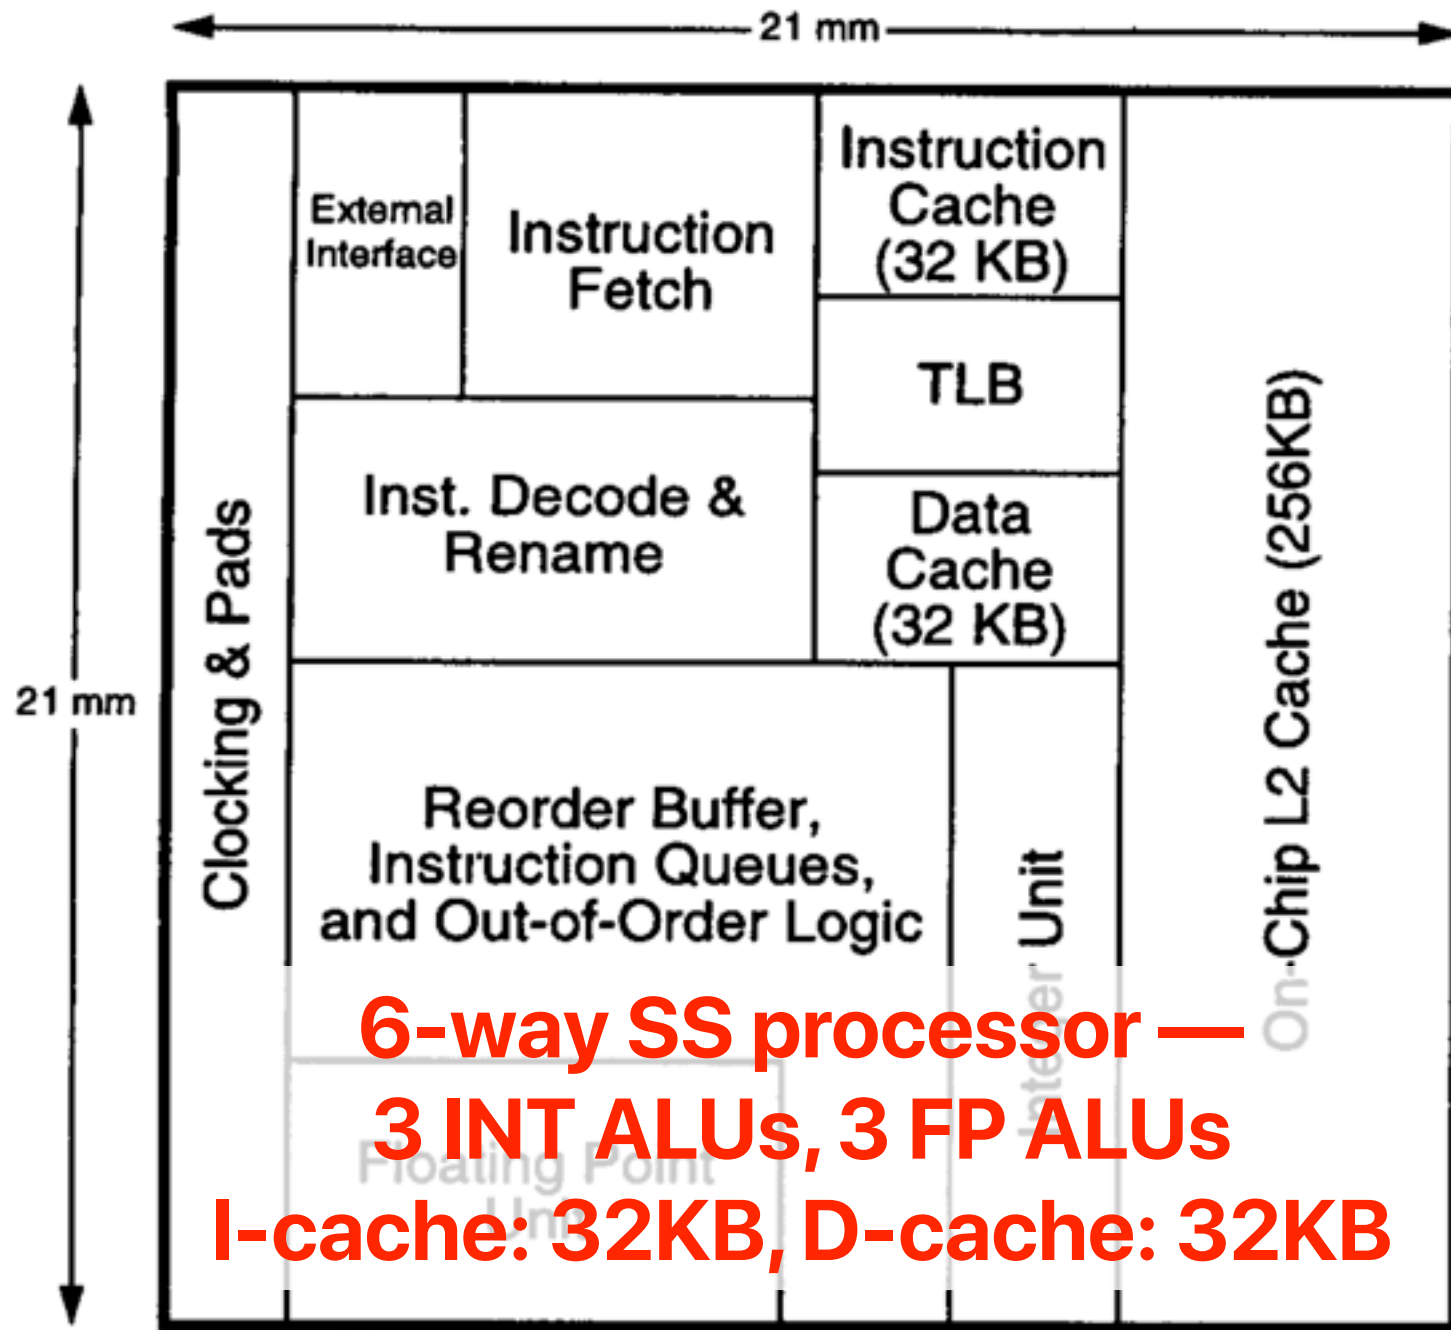


Intel Sandy Bridge

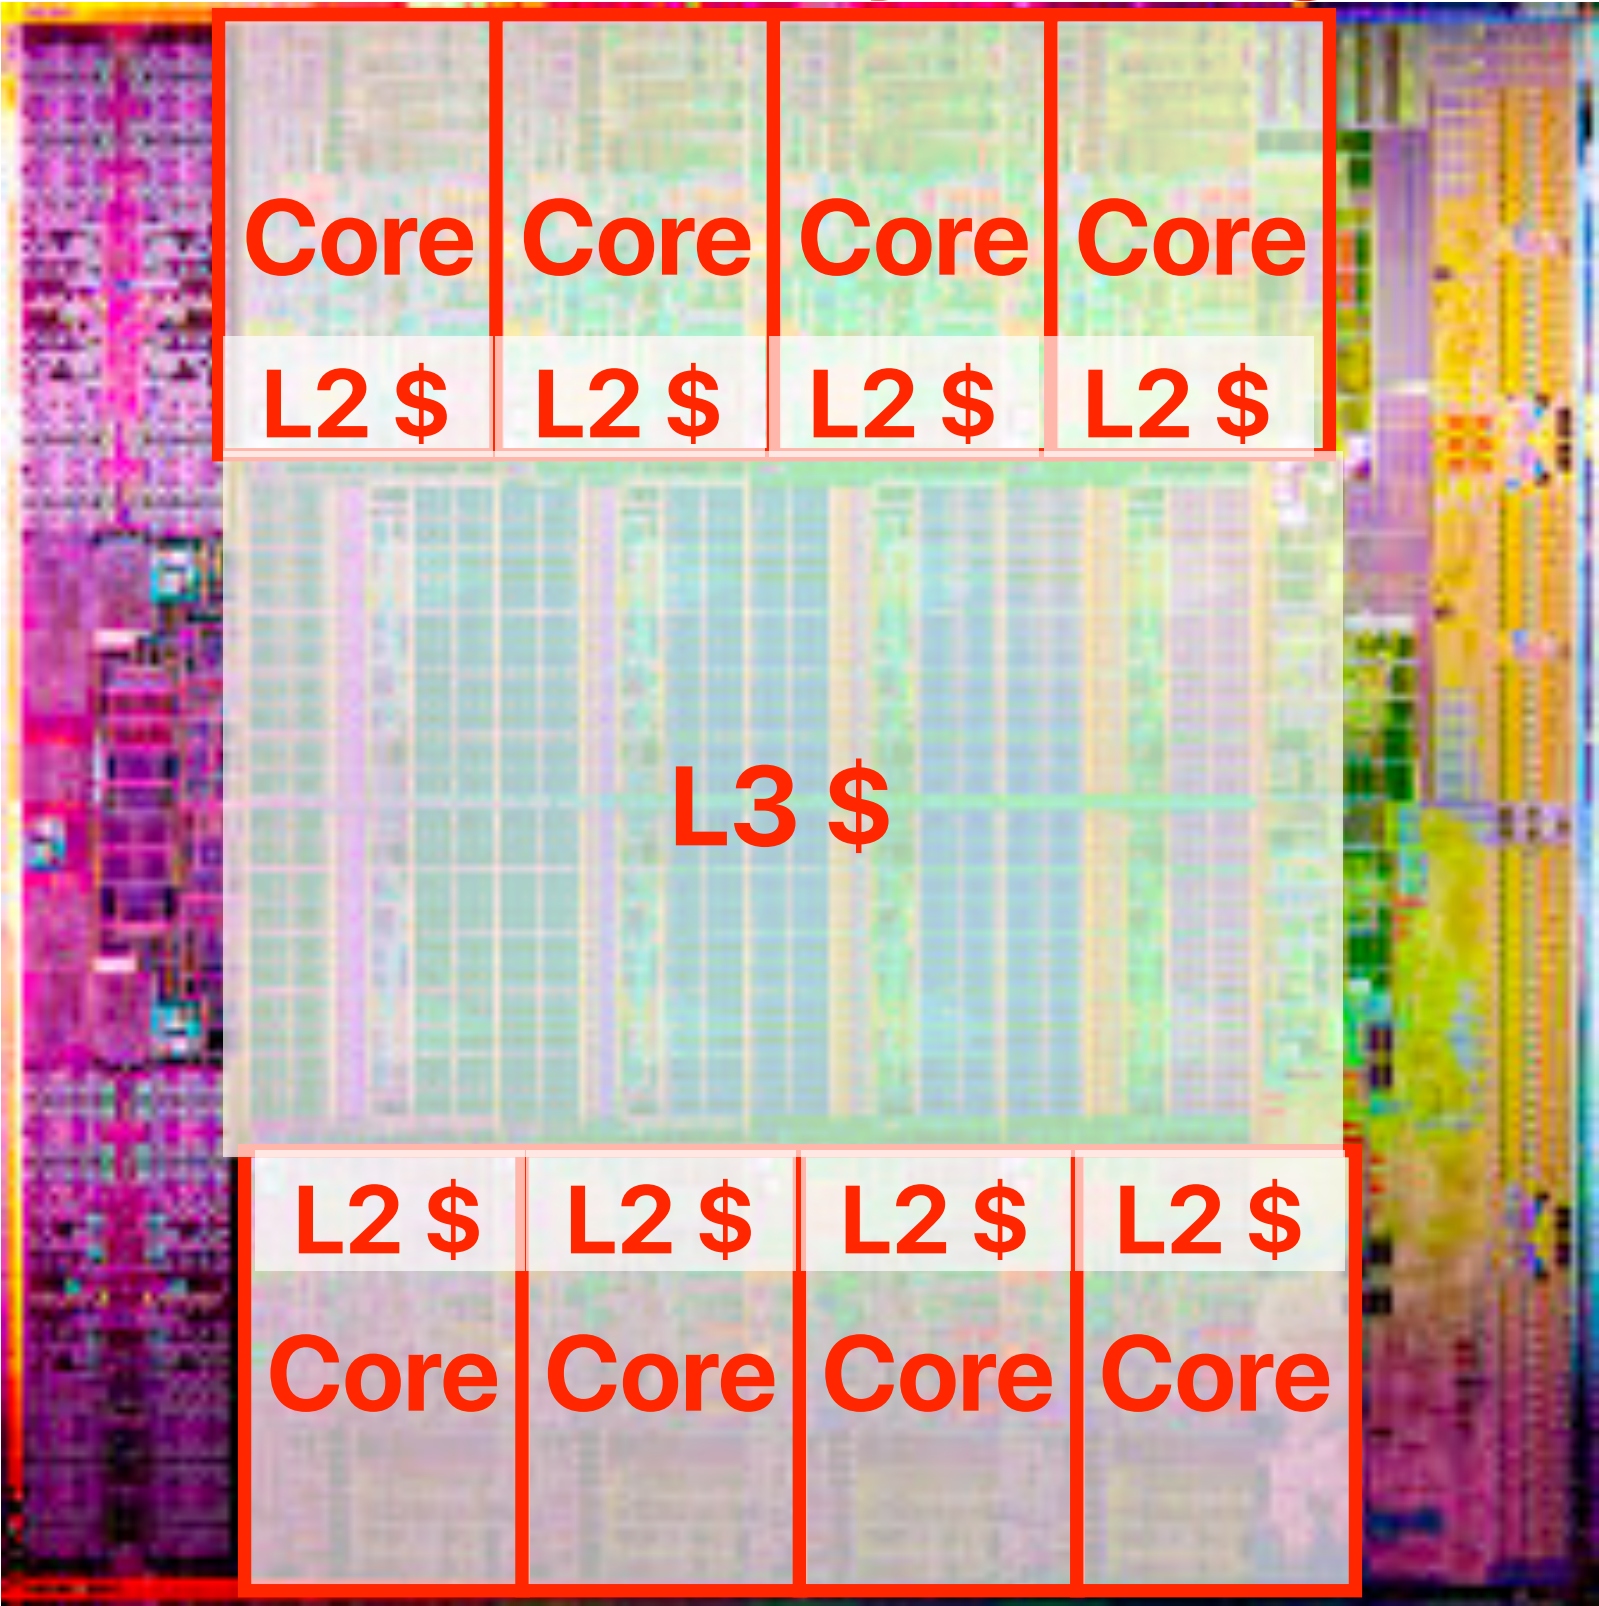


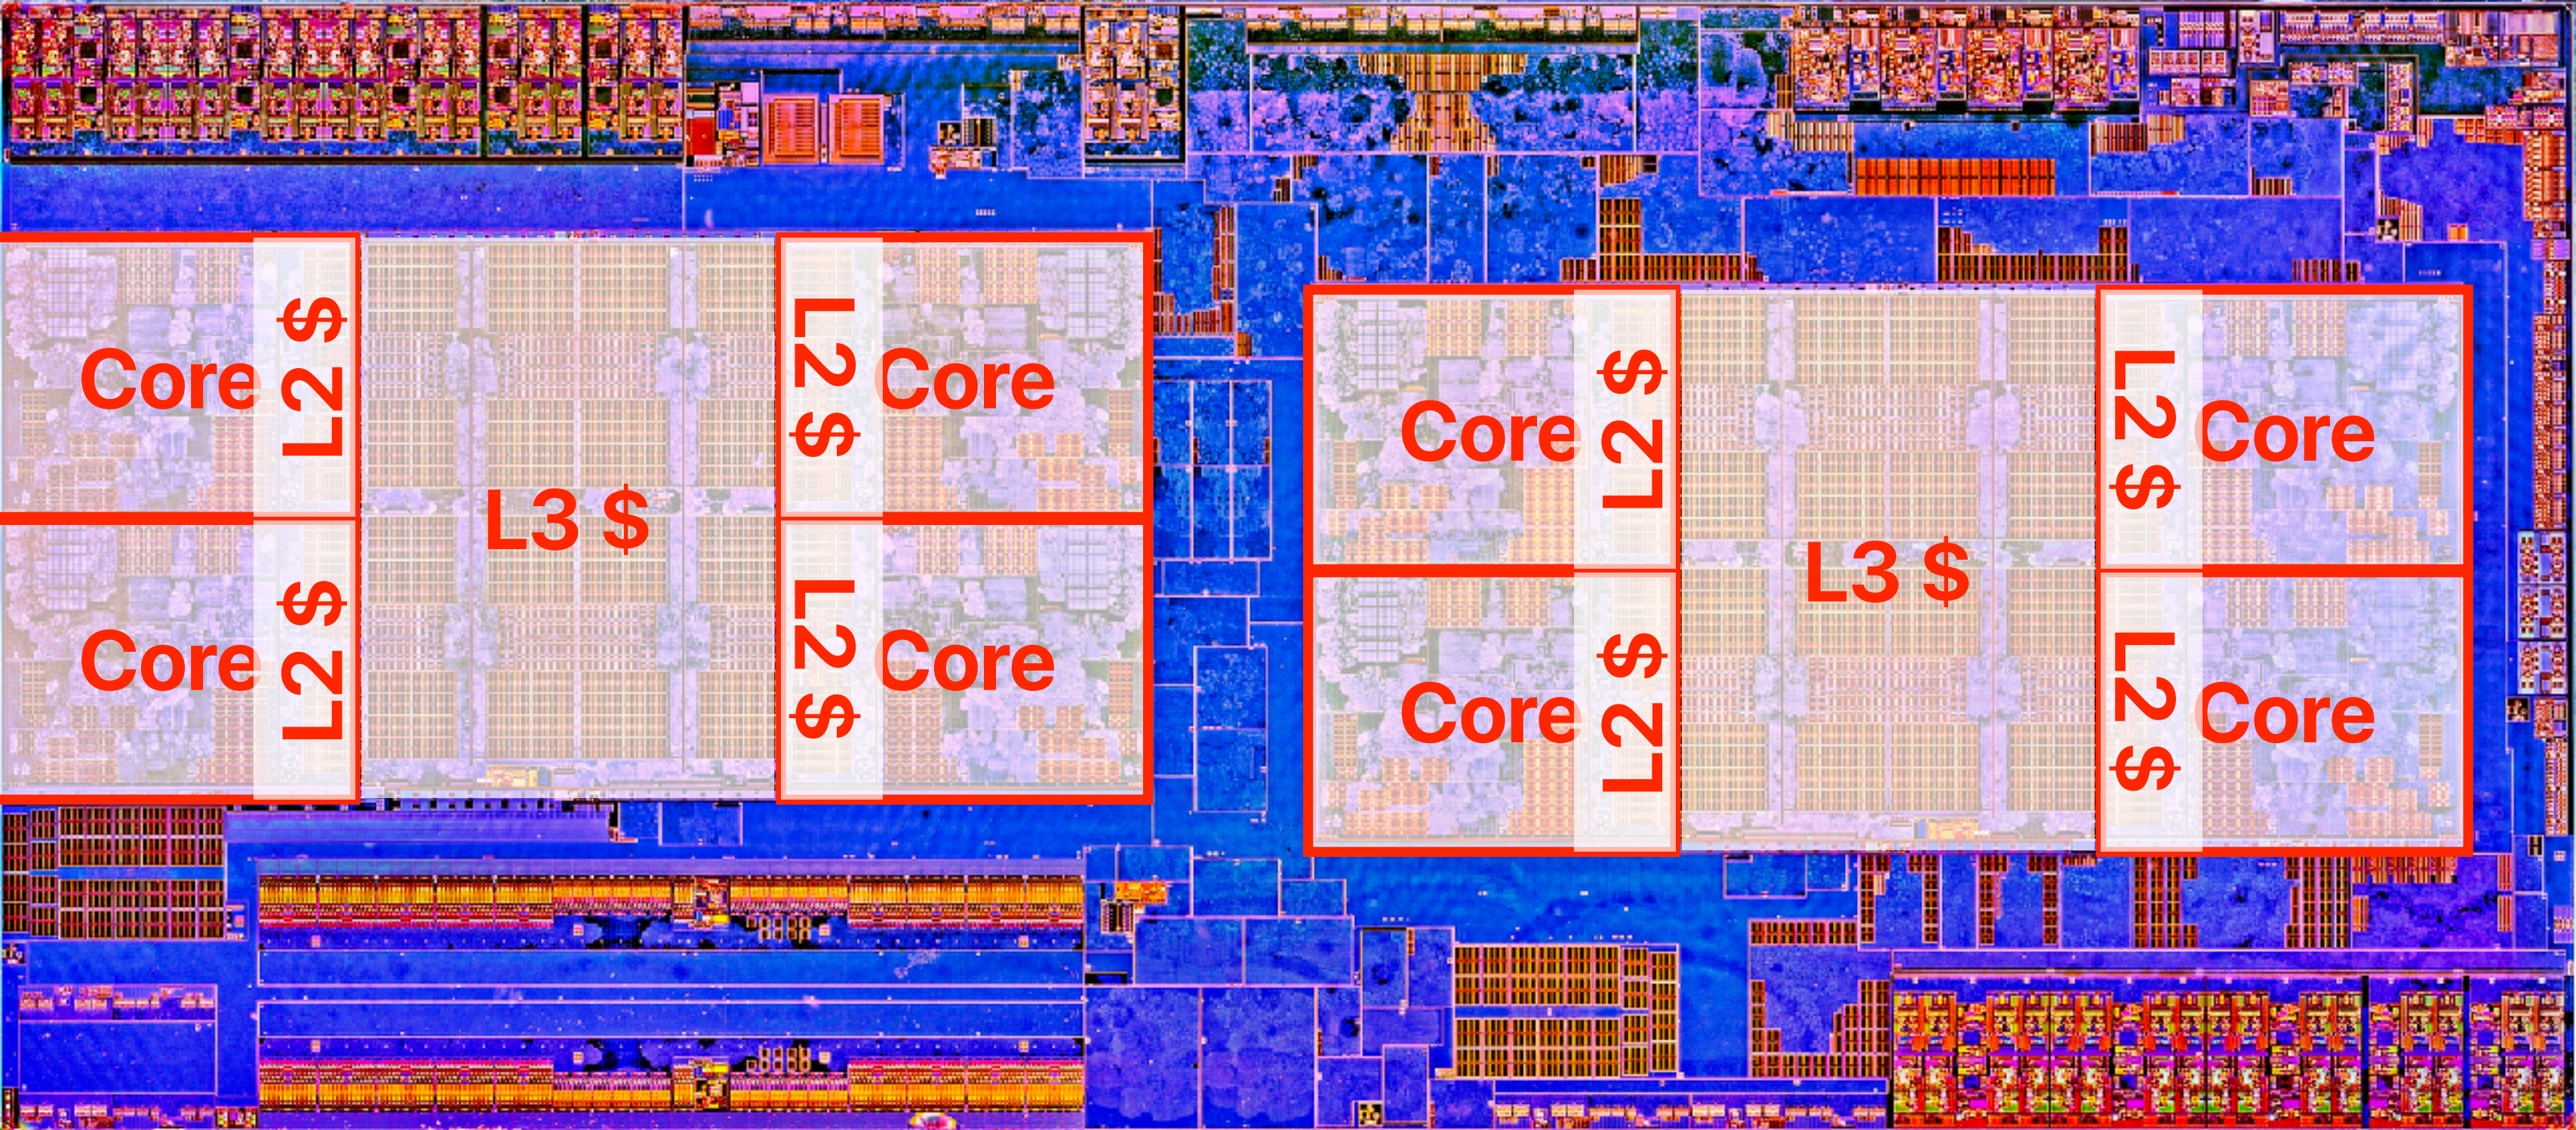

Concept of CMP

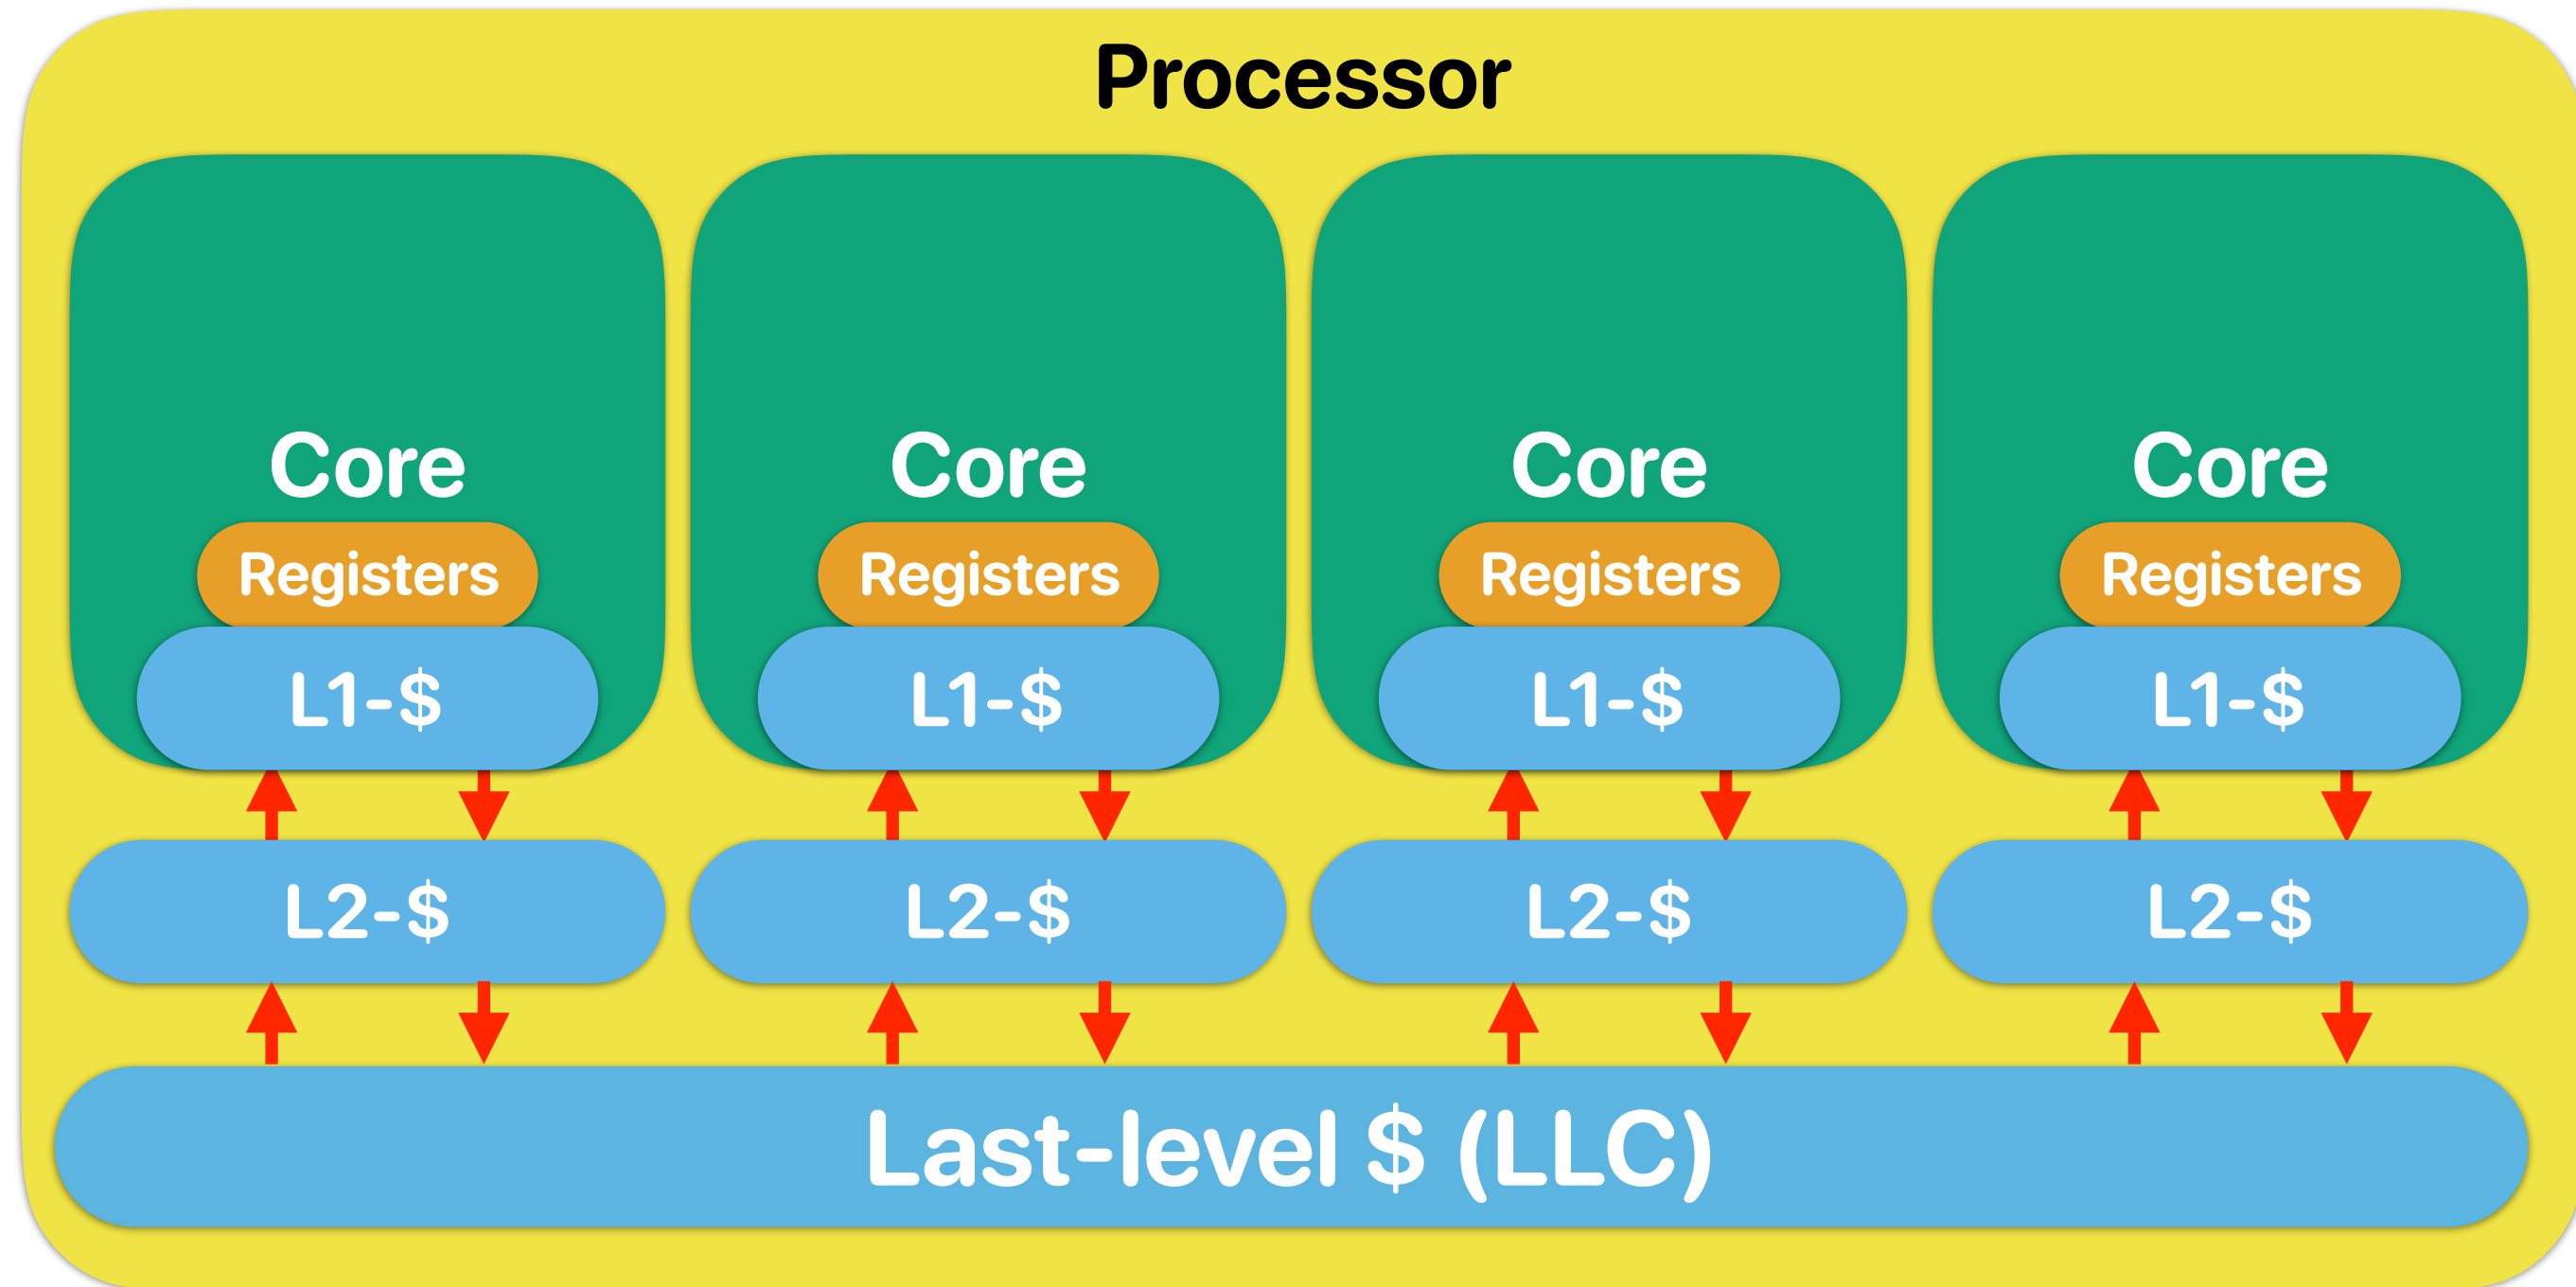

Performance of CMP

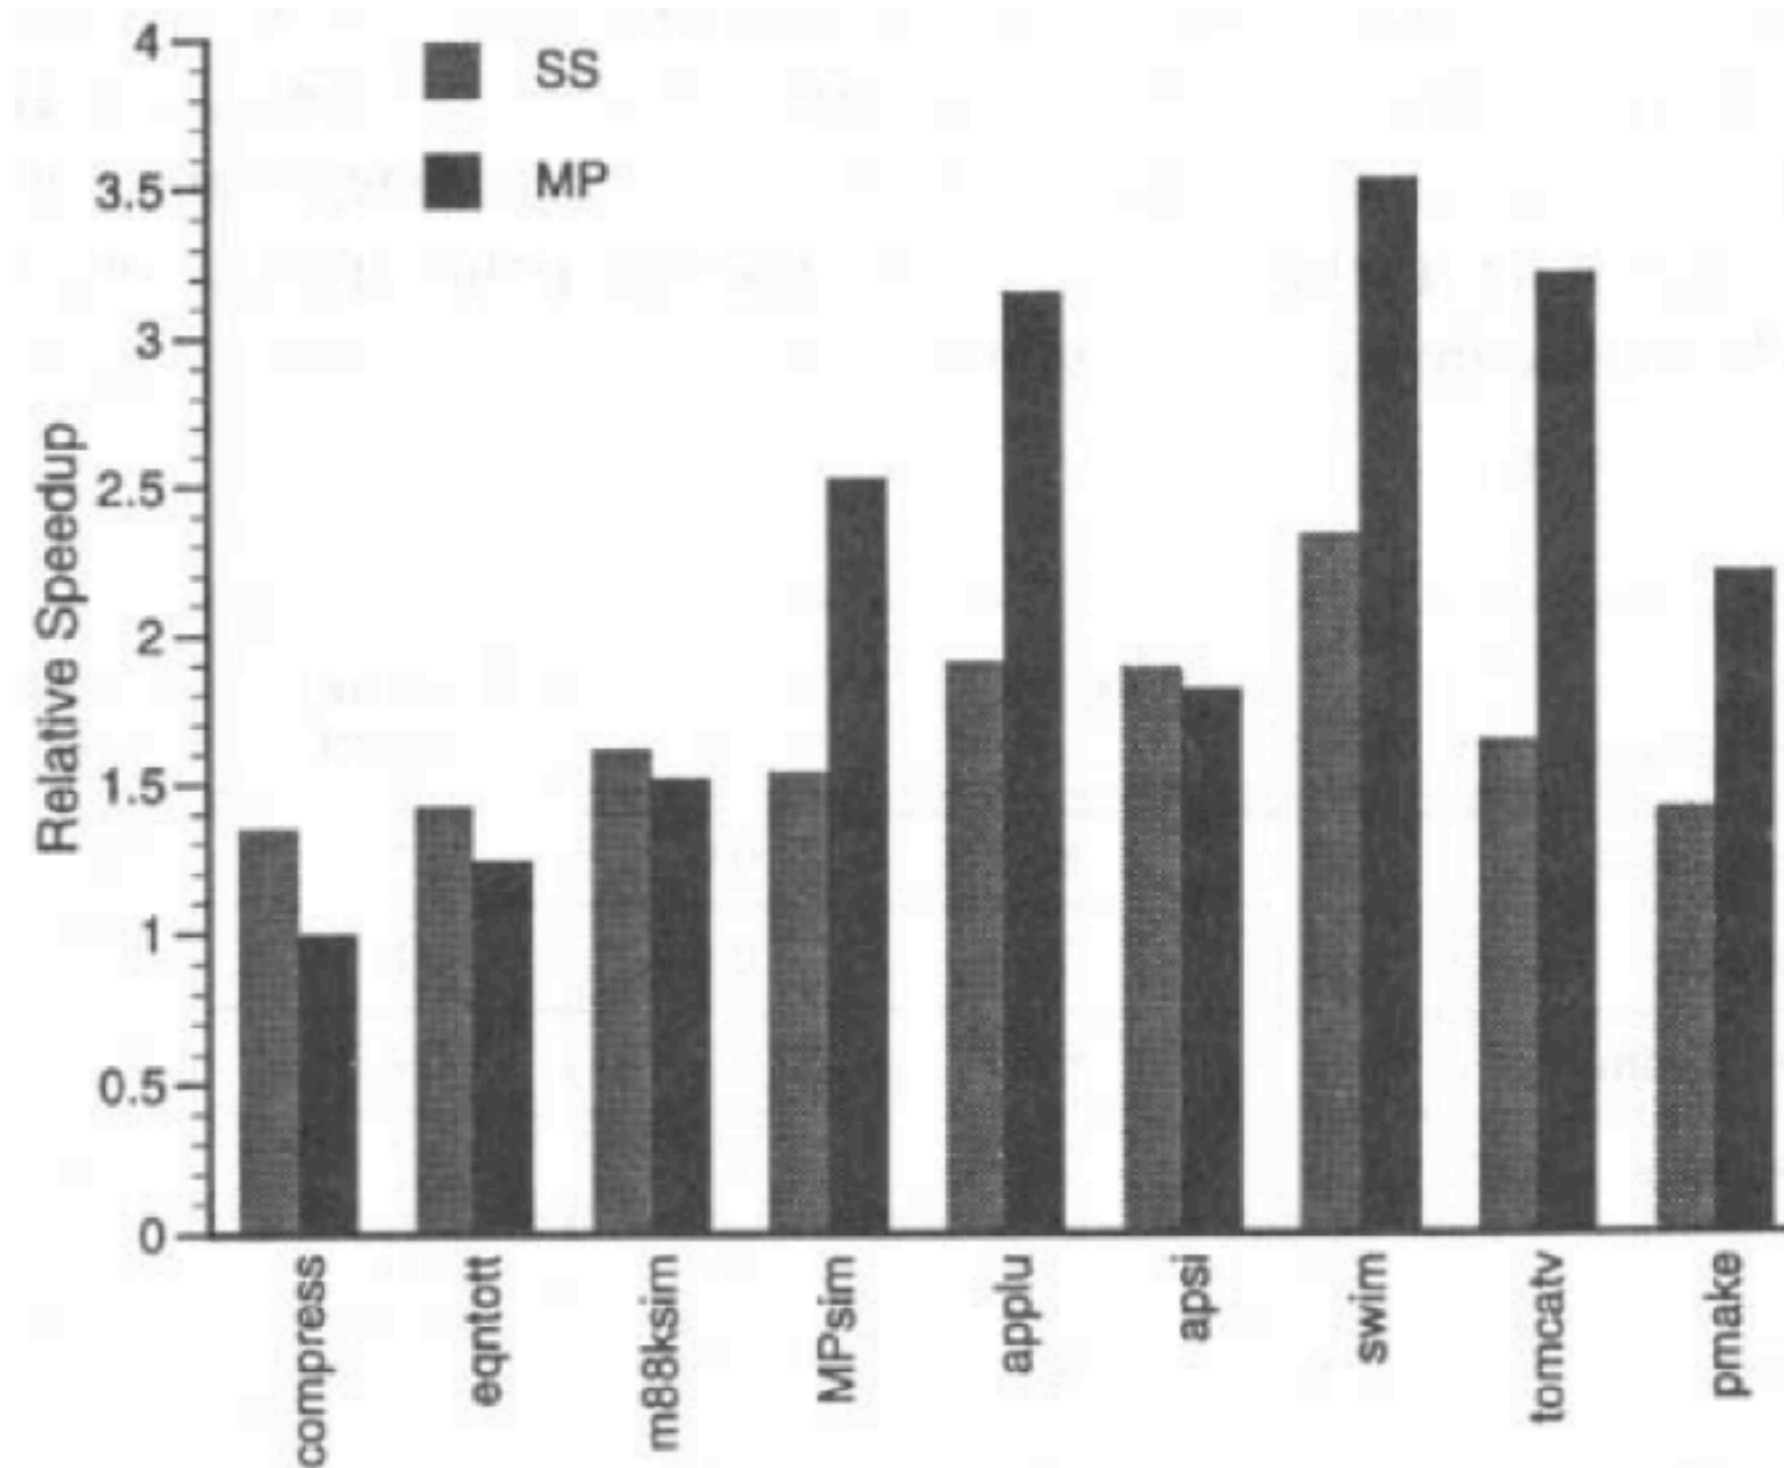

SMT v.s. CMP

- Both CMP & SMT exploit thread-level or task-level parallelism. Assuming both application X and application Y have similar instruction combination, say 60% ALU, 20% load/store, and 20% branches. Consider two processors:

P1: CMP with a 2-issue pipeline on each core. Each core has a private L1 32KB D-cache

P2: SMT with a 4-issue pipeline. 64KB L1 D-cache

Which one do you think is better?


- A. P1
- B. P2

Architectural Support for Parallel Programming


Parallel programming

- To exploit parallelism you need to break your computation into multiple "processes" or multiple "threads"
- Processes (in OS/software systems)
 - Separate programs actually running (not sitting idle) on your computer at the same time.
 - Each process will have its own virtual memory space and you need explicitly exchange data using inter-process communication APIs
- Threads (in OS/software systems)
 - Independent portions of your program that can run in parallel
 - All threads share the same virtual memory space
- We will refer to these collectively as "threads"
 - A typical user system might have 1-8 actively running threads.
 - Servers can have more if needed (the sysadmins will hopefully configure it that way)

What software thinks about "multiprogramming" hardware

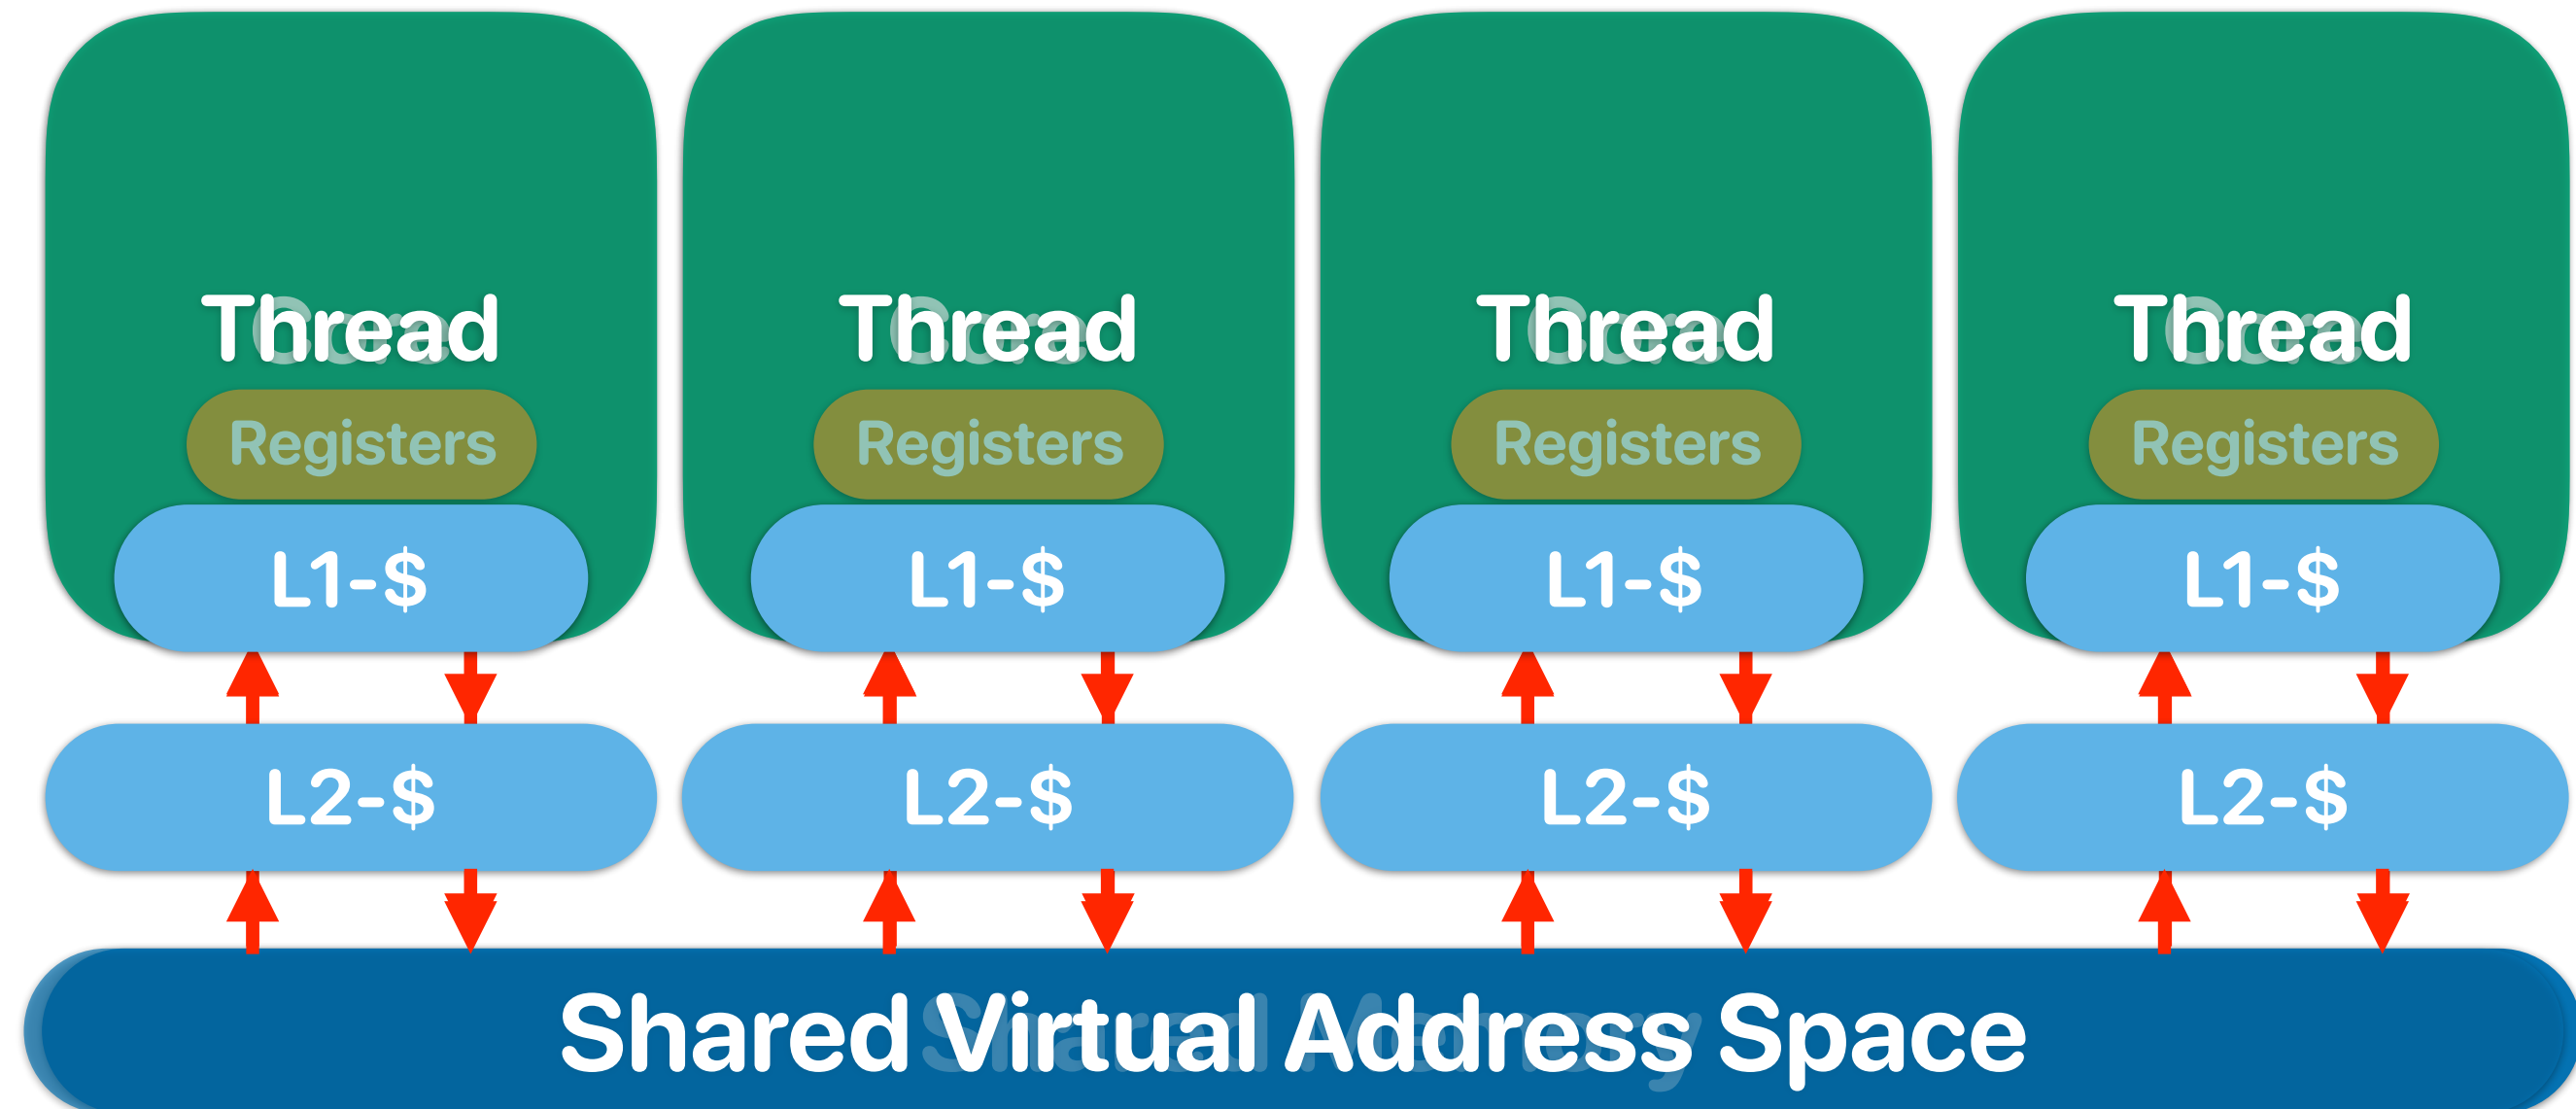

What software thinks about "multiprogramming" hardware

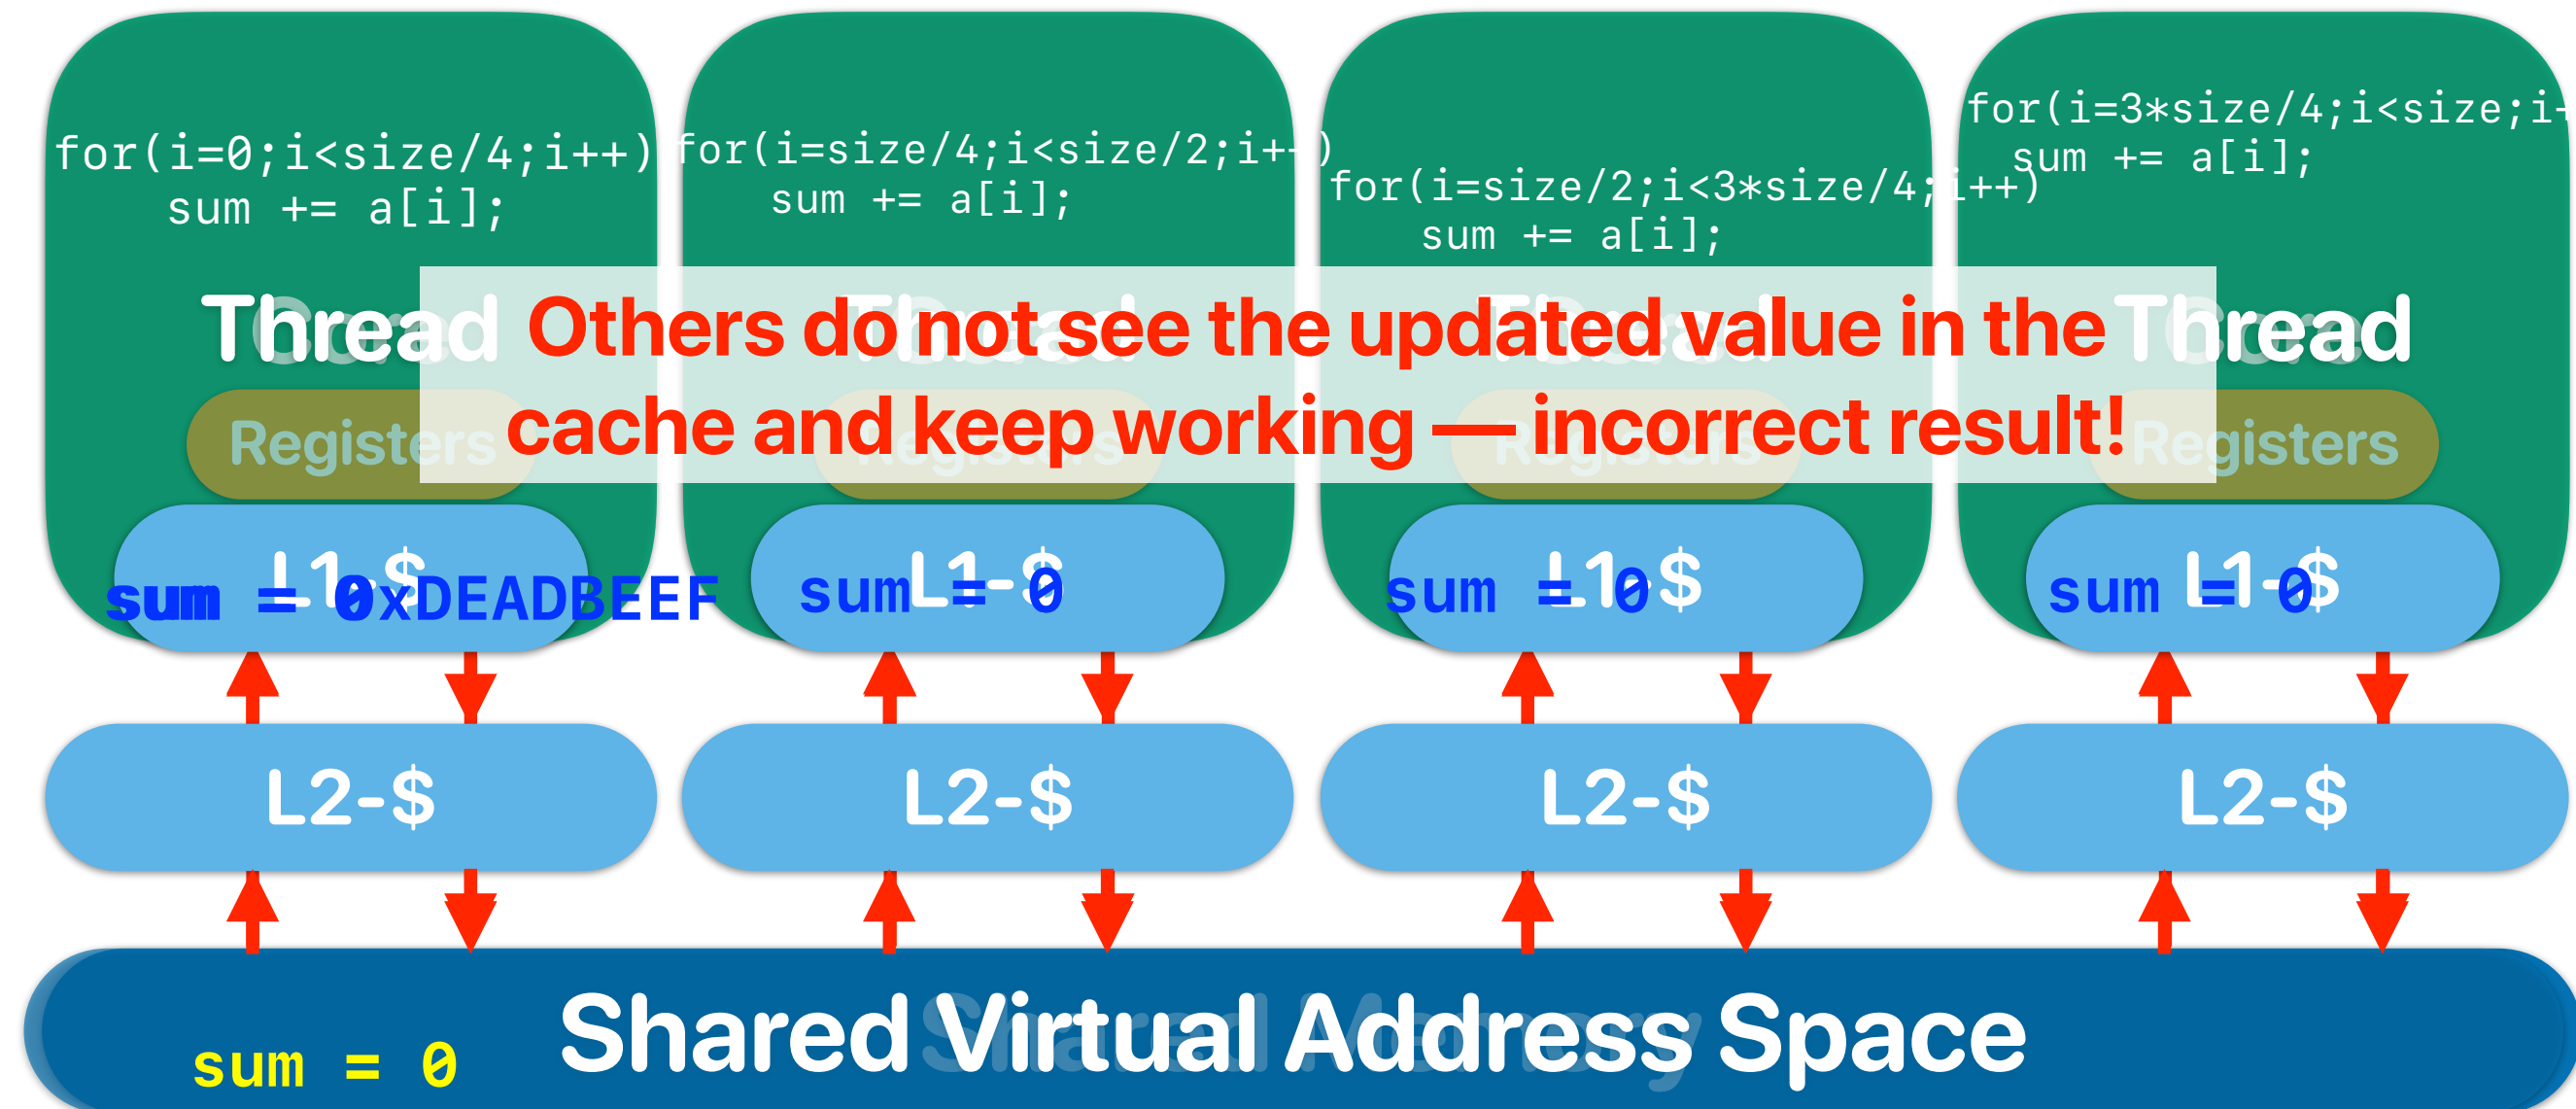

Coherency & Consistency

- Coherency — Guarantees all processors see the same value for a variable/memory address in the system when the processors need the value at the same time
 - What value should be seen
- Consistency — All threads see the change of data in the same order
 - When the memory operation should be done

Simple cache coherency protocol


- Snooping protocol
 - Each processor broadcasts / listens to cache misses
- State associate with each block (cacheline)
 - Invalid
 - The data in the current block is invalid
 - Shared
 - The processor can read the data
 - The data may also exist on other processors
 - Exclusive
 - The processor has full permission on the data
 - The processor is the only one that has up-to-date data

Coherent way-associative cache


memory address: 0x0 8 2 4
tag index set block
memory address: 0b00001000000100100

States	D	tag	data
01	1	0x29	IIJJKKLLMMNNOOPP
01	1	0xDE	QQRRSSTTUUVVWWXX
01	0	0x10	YYZZAABBCCDDEEFF
00	1	0x8A	AABBCCDDEEGGFFHH
10	1	0x60	IIJJKKLLMMNNOOPP
10	1	0x70	QQRRSSTTUUVVWWXX
10	1	0x10	QQRRSSTTUUVVWWXX
10	1	0x11	YYZZAABBCCDDEEFF


States	D	tag	data
01	1	0x00	AABBCCDDEEGGFFHH
01	1	0x10	IIJJKKLLMMNNOOPP
01	0	0xA1	QQRRSSTTUUVVWWXX
00	1	0x10	YYZZAABBCCDDEEFF
10	1	0x31	AABBCCDDEEGGFFHH
10	1	0x45	IIJJKKLLMMNNOOPP
10	1	0x41	QQRRSSTTUUVVWWXX
10	1	0x68	YYZZAABBCCDDEEFF

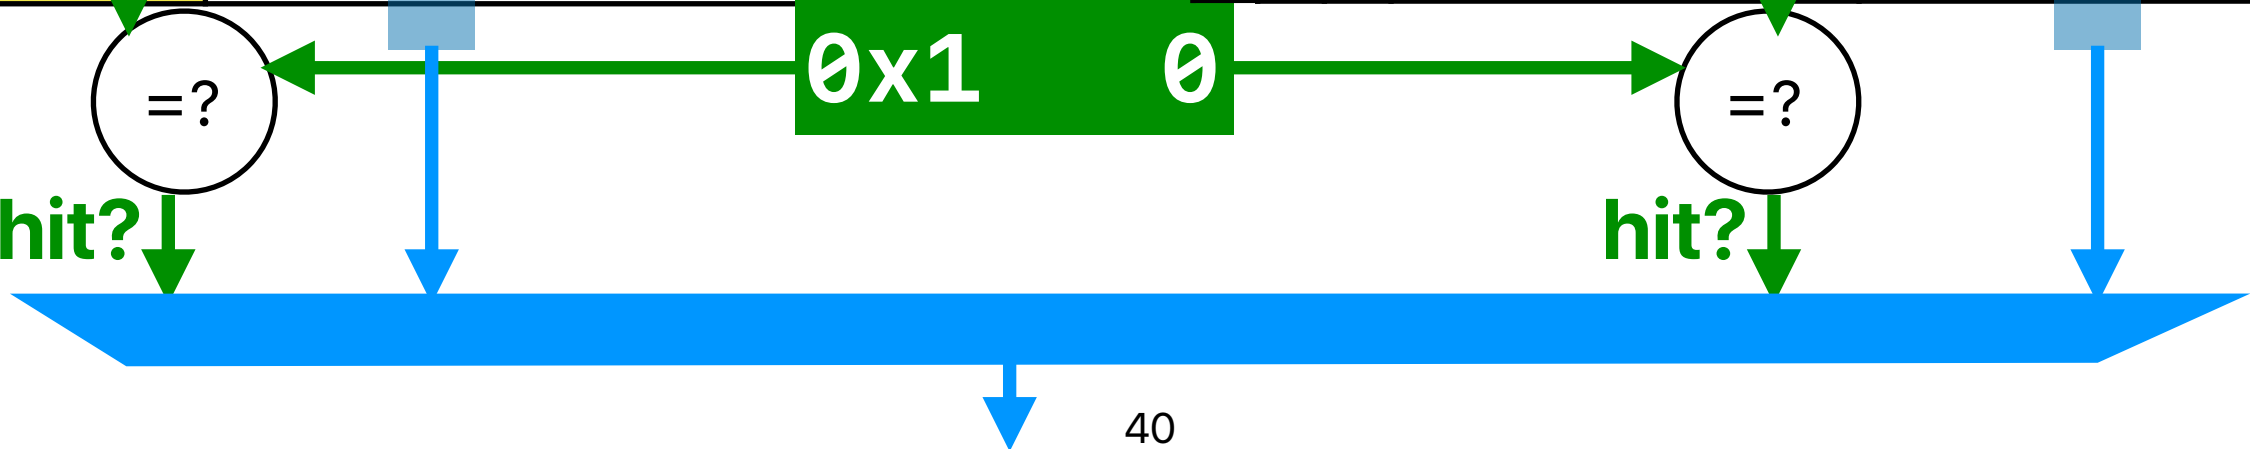

Snooping Protocol

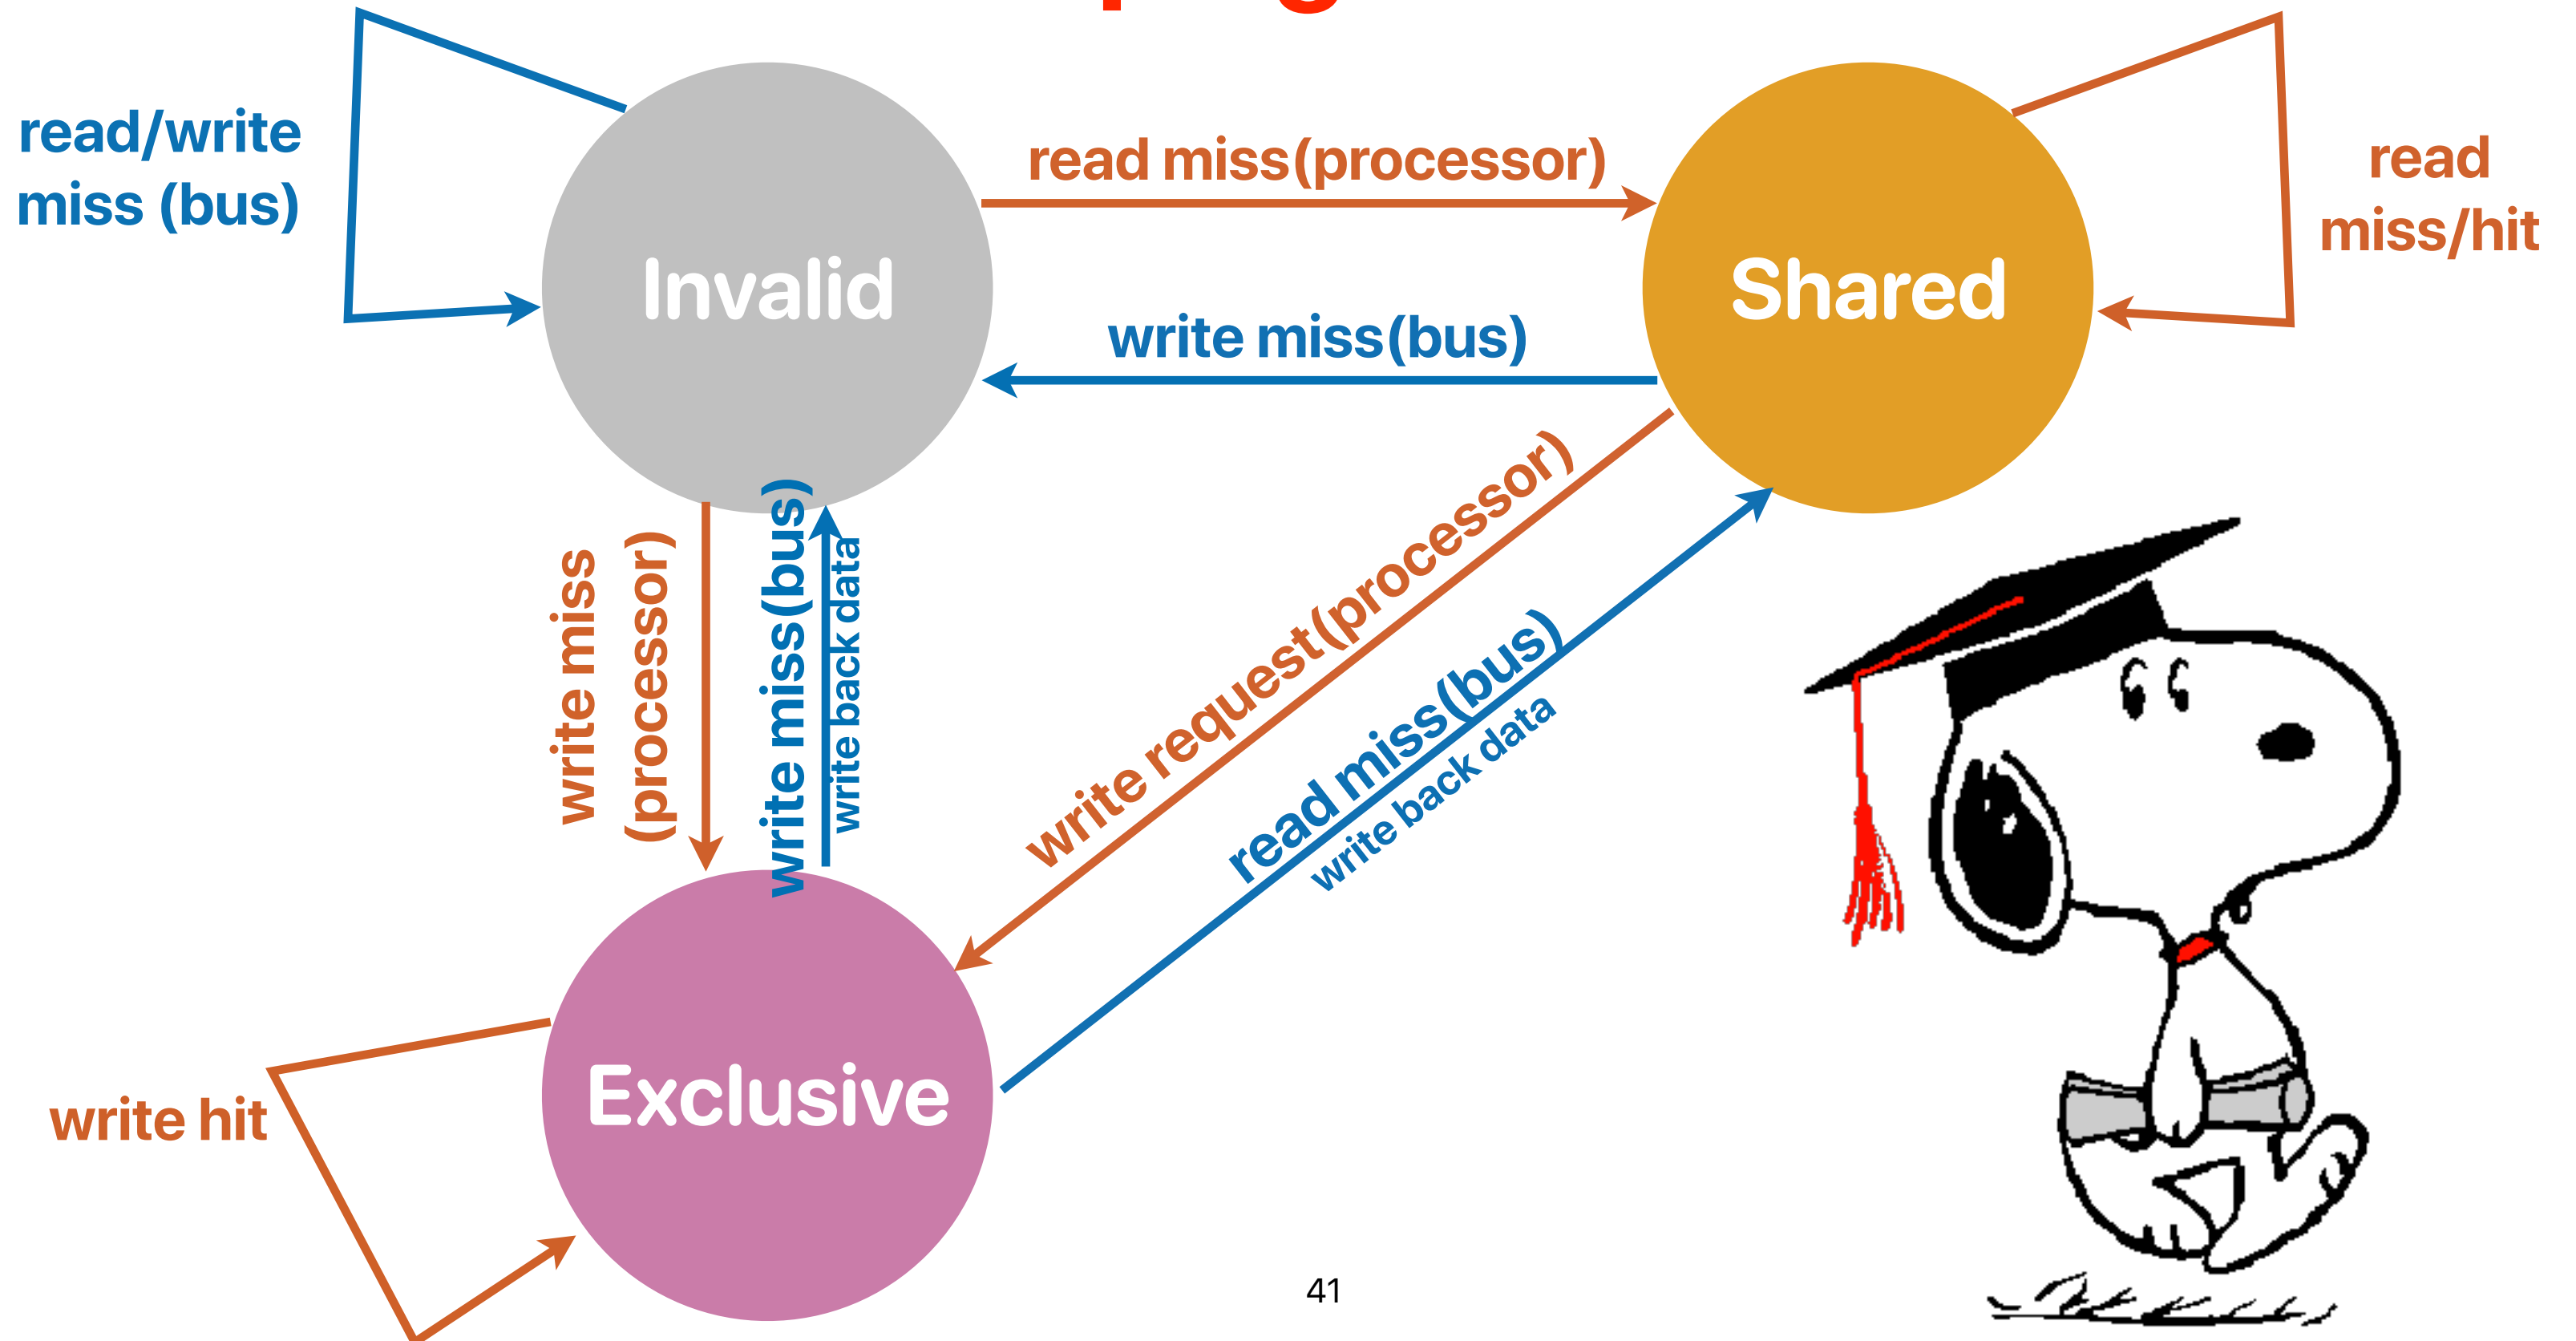

What happens when we write in coherent caches?

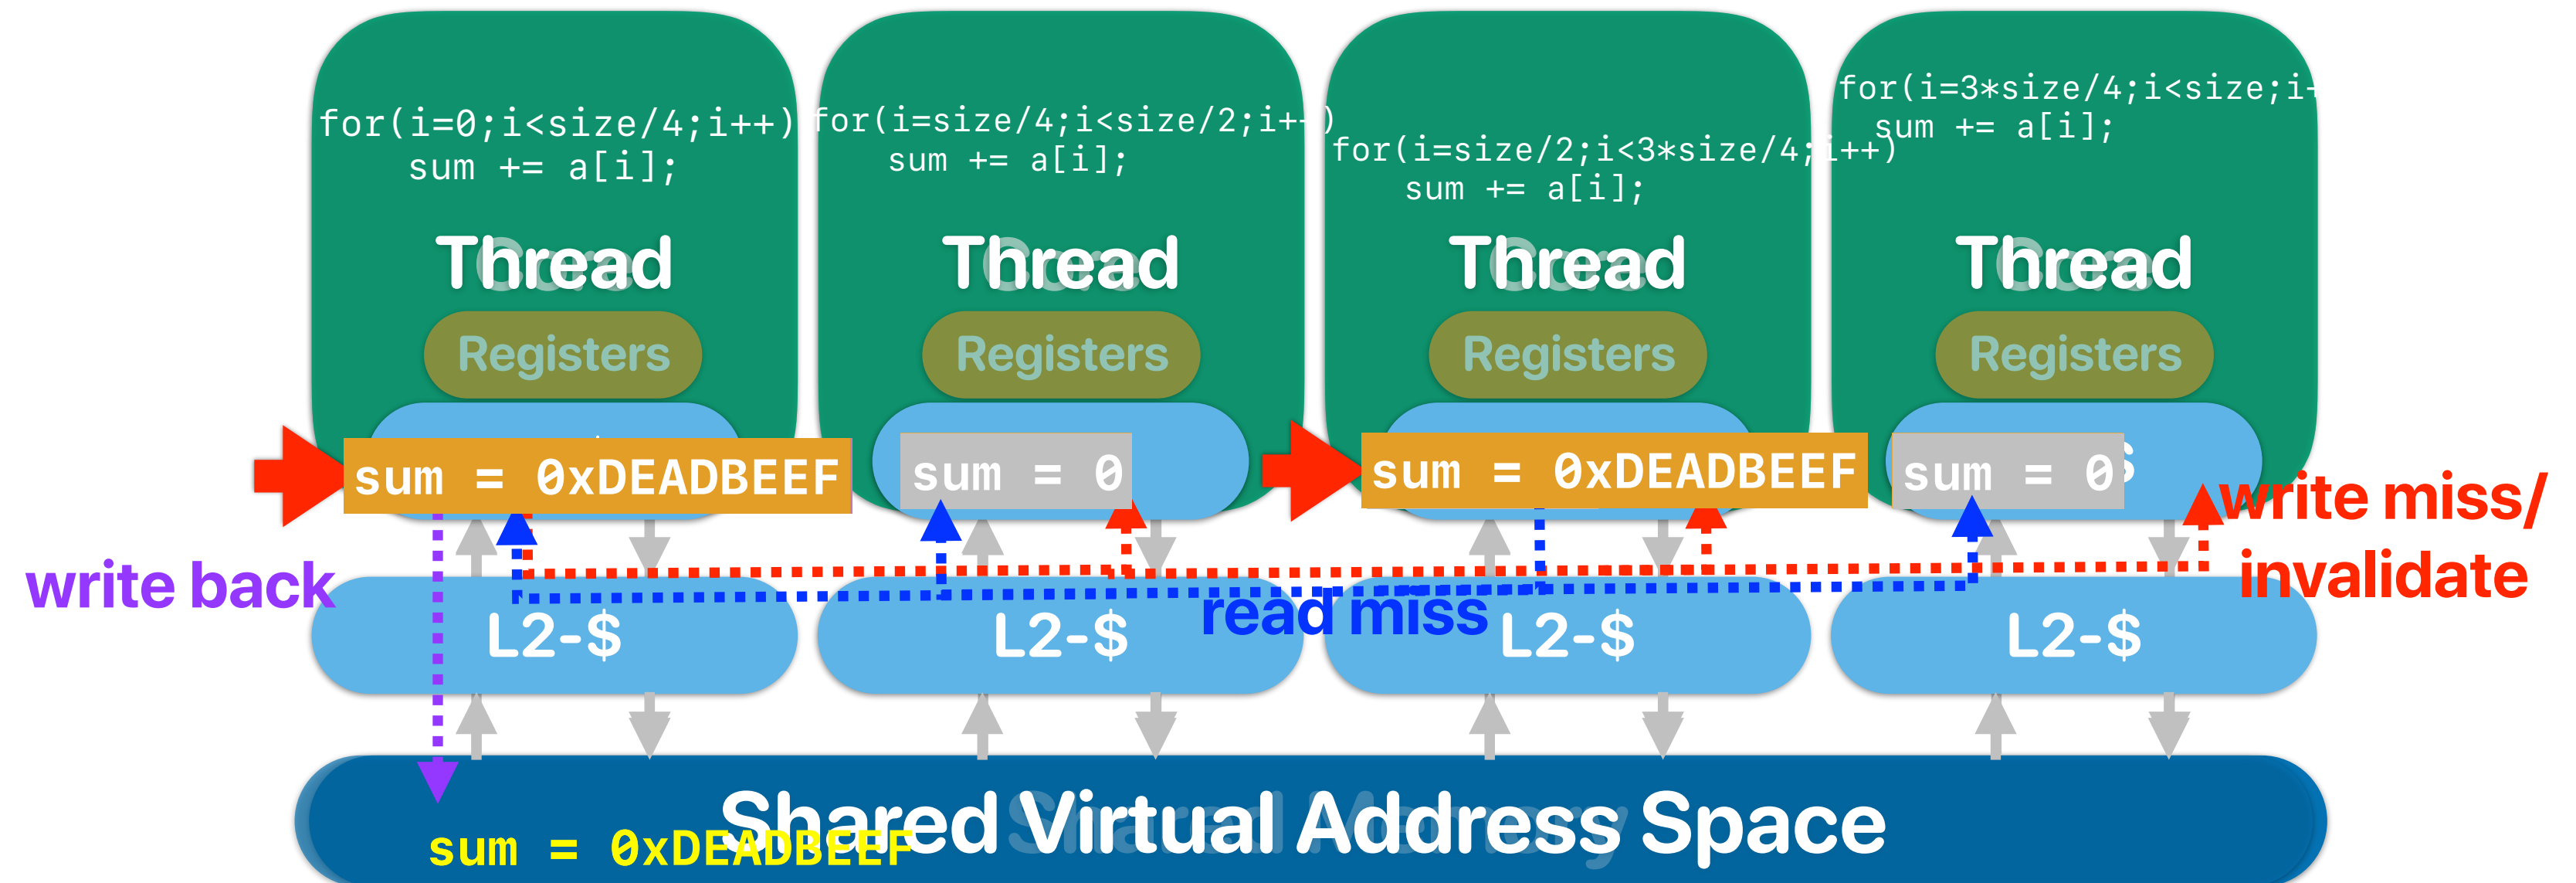

Cache coherency

- Assuming that we are running the following code on a CMP with a cache coherency protocol, how many of the following outputs are possible? (a is initialized to 0 as assume we will output more than 10 numbers)

thread 1	thread 2
<pre>while(1) printf("%d ", a);</pre>	<pre>while(1) a++;</pre>

- ① 0 1 2 3 4 5 6 7 8 9
② 1 2 5 9 3 6 8 10 12 13
③ 1 1 1 1 1 1 1 64 100
④ 1 1 1 1 1 1 1 1 1 100
A. 0
B. 1
C. 2
D. 3
E. 4

Announcement

- Final Review on 12/2 — 7pm-8:20pm
- Reading quiz due next Monday
- Homework #4 due 12/4
- iEval submission — attach your “confirmation” screen, you get an extra/bonus homework
- Project due on 12/2
 - You can only turn-in “helper.c”
 - `mcfutil.c:refresh_potential()` creates helper threads
 - `mcfutil.c:refresh_potential()` calls `helper_thread_sync()` function periodically
 - It's your task to think what to do in `helper_thread_sync()` and `helper_thread()` functions
 - Please DO READ papers before you ask what to do
 - Formula for grading — **`min(100, speedup*100)`**
 - No extension
- Office hour for Hung-Wei **next** week — MWF 1p-2p — no office hour this week